

The next generation of Electrification

Electrical Installations Products from A to Z

Price List w.e.f. 5th November 2026

SIEMENS




The safe choice – **now made smarter**

SENTRON circuit protection devices with communication and measuring function

siemens.com/circuit-protection

SIEMENS

Index

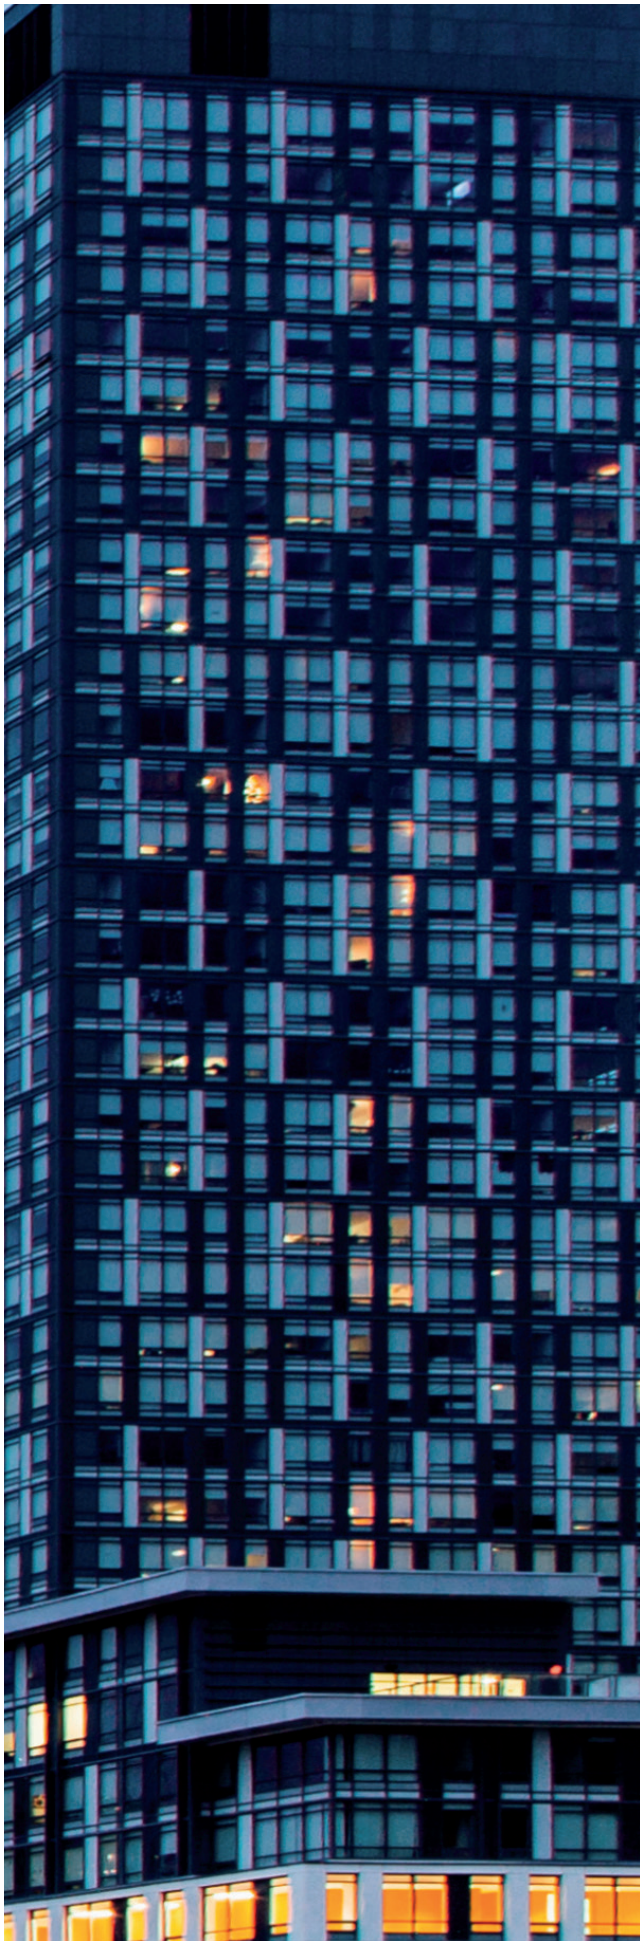

Sr. No.	Items	Pg. No.
1	**Betagard Miniature Circuit Breakers**	
	5SL6, 7.5kA with C characteristics	5
	5SL6, 7.5kA with B characteristics	6
	5SL4, 10kA with C characteristics	7
	5SL7, with C characteristics	8
	5SL7, with D characteristics	9
2	**Betagard Circuit Breakers**	
	5SL7, with K characteristics	13
	5SL4, with Z characteristics	14
	5SP4, 10kA with C and D characteristics	15
	Betagard Isolators 5TL1	15
3	**Betagard DC Circuit Breakers**	
	5SL5, 10kA DC with C characteristics	16
4	**Betagard Residual Current Circuit Breakers**	
	5SV RCCB - Type AC, Type A	18
5	**SENTRON Residual Current Units**	
	5SM2..RC, RC Units - Type AC, Type A	20
	Accessories selection - Remote contol mechanism	21
6	**Betagard Residual Current Breaker Operators**	
	5SU1 RCBO, 10kA, Type AC with C and D characteristics	22
	5SU1 RCBO, 10kA, Type A with C and D characteristics	23
7	**Betagard Accessories**	24
8	**Opulenz**	25
9	**Arc Fault Detection Devices (AFDD)**	26-27
10	**SENTRON COM Devices** NEW	28
	5SV6 AFDD COM	29
	7KN Powercenter 1100	29
11	**SINOPLUS 5TR4 ACCL**	30
12	**Betagard Distribution Boards**	
	8GB32 SPN, TPN & Phase Segregated DBs	32-34
	Industrial Plug & Socket DBs, Simbox WP DBs	35
	Accessories for Betagard DBs	36
13	**SINOPLUS Low Voltage Switchgears**	37
14	**SENTRON Surge Protection Devices**	
	Surge Protection Devices	39-41
15	**SENTRON Modular Devices**	
	Insta contactors, Twilight switch	43
	Voltage relays, Indicators and Fuse monitors	44
	Time switches	45
16	**Fuses with insulated gripping lugs - 3NA6**	46
17	**SINOPLUS MCCBs - 3VJ, RAJA+ Starters ordering info**	47-49
18	**Switch Disconnector Fuses - 3KL and Fuses - 3NA/3NW ordering info**	50
19	**Available till stocks last**	51-52
20	**Discontinued products**	53
21	**Multi channel current measuring system**	54-55
22	**Technical information**	56-57
23	**Customer care**	58

Betagard 5SL MCBs – Inspiring Safety

Terminal covers for protection

High Breaking capacity (Icn)

High endurance cycle

Very low watt loss

Ergonomic handle for identification

High ambient temperature

RoHS Compliant




Unique SLR (Slide Latch-Release) feature for tool free removal from DIN rail allows individual MCB to be removed from bus bar mounted assembly without disturbing other devices

BIS approval for ISI marking as per latest IS/IEC 60898-1:2015 for assured quality and protection

IS/IEC 60898 - 1

CM/L No. 2255548



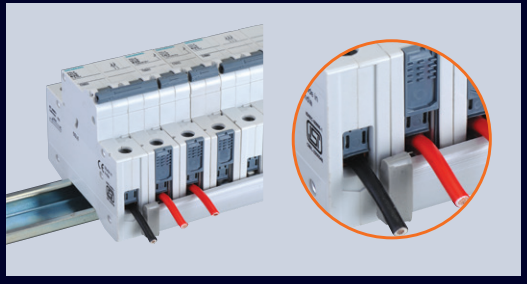

Unique termination mechanism enables firm mounting of Bus bar together with wire; and provides front access to wires for safe installation

Betagard Miniature Circuit Breakers
5SL6, with C Characteristics

IS/IEC 60898 - 1
CM/L No. 2255548

- Standards: IS/IEC 60898-1:2015
- Voltage: Un 240/415V, 50...60Hz^
- With ISI marking: CM/L No. 2255548

7500A	Rated Current I_n (A)	MW#	Reference No	Unit MRP* ₹	Std. Pkg.** (Nos.)
1P, 240/415V AC 	0.5	1	5SL61057RC	1046.-	1/12
	1		■ 5SL61017RC	732.-	1/12
	2		5SL61027RC	732.-	1/12
	3		5SL61037RC	732.-	1/12
	4		■ 5SL61047RC	732.-	1/12
	6		■ 5SL61067RC	454.-	1/12
	8		5SL61087RC	454.-	1/12
	10		■ 5SL61107RC	454.-	1/12
	13		5SL61137RC	454.-	1/12
	16		■ 5SL61167RC	454.-	1/12
	20		■ 5SL61207RC	454.-	1/12
	25		5SL61257RC	454.-	1/12
	32		5SL61327RC	454.-	1/12
	40		5SL61407RC	998.-	1/12
	50		5SL61507RC	1148.-	1/12
	63		5SL61637RC	1148.-	1/12
2P, 415V AC 	0.5	2	5SL62057RC	2681.-	1/6
	1		5SL62017RC	2268.-	1/6
	2		5SL62027RC	2268.-	1/6
	3		5SL62037RC	2268.-	1/6
	4		5SL62047RC	2268.-	1/6
	6		■ 5SL62067RC	1697.-	1/6
	8		5SL62087RC	1697.-	1/6
	10		■ 5SL62107RC	1697.-	1/6
	13		5SL62137RC	1697.-	1/6
	16		5SL62167RC	1697.-	1/6
	20		■ 5SL62207RC	1697.-	1/6
	25		5SL62257RC	1697.-	1/6
	32		5SL62327RC	1697.-	1/6
	40		5SL62407RC	2382.-	1/6
	50		5SL62507RC	2796.-	1/6
	63		5SL62637RC	2796.-	1/6
3P, 415V AC 	0.5	3	5SL63057RC	3764.-	1/4
	1		5SL63017RC	3185.-	1/4
	2		5SL63027RC	3185.-	1/4
	4		5SL63047RC	3185.-	1/4
	6		■ 5SL63067RC	2549.-	1/4
	10		■ 5SL63107RC	2549.-	1/4
	16		■ 5SL63167RC	2549.-	1/4
	20		5SL63207RC	2549.-	1/4
	25		5SL63257RC	2549.-	1/4
	32		■ 5SL63327RC	2549.-	1/4
	40		■ 5SL63407RC	3567.-	1/4
	50		5SL63507RC	3983.-	1/4
	63		■ 5SL63637RC	3983.-	1/4
4P, 415V AC 	0.5	4	5SL64057RC	5195.-	1/3
	1		5SL64017RC	4396.-	1/3
	2		5SL64027RC	4396.-	1/3
	4		5SL64047RC	4396.-	1/3
	6		5SL64067RC	3524.-	1/3
	10		5SL64107RC	3524.-	1/3
	16		5SL64167RC	3524.-	1/3
	20		5SL64207RC	3524.-	1/3
	25		5SL64257RC	3524.-	1/3
	32		5SL64327RC	3524.-	1/3
	40		■ 5SL64407RC	4554.-	1/3
	50		5SL64507RC	5272.-	1/3
	63		■ 5SL64637RC	5272.-	1/3

■ Stock items

Note:
* MRP - Maximum Retail Price
# 1MW (Module Width) = 18mm
** Purchase MOQ for our authorized dealers is in multiples of standard packing, contact Siemens Sales Office for further details
^ Suitable for DC networks in Telecom application; 60V DC for 1P & 110V DC for 2P (contact sales office for connection diagram)

Betagard Miniature Circuit Breakers
5SL6, with B Characteristics

IS/IEC 60898 - 1
CM/L No. 2255548

- Standards: IS/IEC 60898-1:2015
- Voltage: Un 240/415V, 50...60Hz
- With ISI marking: CM/L No. 2255548

7500A	Rated Current I_n (A)	MW#	Reference No	Unit MRP* ₹	Std. Pkg.** (Nos.)
1P, 240/415V AC 	6	1	■ 5SL61066RC	444.-	1/12
	10		5SL61106RC	444.-	1/12
	16		■ 5SL61166RC	444.-	1/12
	20		■ 5SL61206RC	444.-	1/12
	25		5SL61256RC	444.-	1/12
	32		■ 5SL61326RC	444.-	1/12
	40		5SL61406RC	992.-	1/12
	50		5SL61506RC	1114.-	1/12
	63		5SL61636RC	1114.-	1/12
2P, 415V AC 	6	2	5SL62066RC	1679.-	1/6
	10		5SL62106RC	1679.-	1/6
	16		5SL62166RC	1679.-	1/6
	20		5SL62206RC	1679.-	1/6
	25		5SL62256RC	1679.-	1/6
	32		5SL62326RC	1679.-	1/6
	40		5SL62406RC	2361.-	1/6
	50		5SL62506RC	2773.-	1/6
	63		5SL62636RC	2773.-	1/6
3P, 415V AC 	6	3	5SL63066RC	2549.-	1/4
	10		5SL63106RC	2549.-	1/4
	16		5SL63166RC	2549.-	1/4
	20		5SL63206RC	2549.-	1/4
	25		5SL63256RC	2549.-	1/4
	32		5SL63326RC	2549.-	1/4
	40		5SL63406RC	3522.-	1/4
	50		5SL63506RC	3949.-	1/4
	63		5SL63636RC	3949.-	1/4
4P, 415V AC 	6	4	5SL64066RC	3506.-	1/3
	10		5SL64106RC	3506.-	1/3
	16		5SL64166RC	3506.-	1/3
	20		5SL64206RC	3506.-	1/3
	25		5SL64256RC	3506.-	1/3
	32		5SL64326RC	3506.-	1/3
	40		5SL64406RC	4375.-	1/3
	50		5SL64506RC	5257.-	1/3
	63		5SL64636RC	5257.-	1/3

■ Stock items

Note:
* MRP - Maximum Retail Price # 1MW (Module Width) = 18mm
** Purchase MOQ for our authorized dealers is in multiples of standard packing, contact Siemens Sales Office for further details



Betagard Miniature Circuit Breakers
5SL4, with C characteristics

IS/IEC 60898 - 1
CM/L No. 2255548

- Standards: IS/IEC 60898-1:2015
- Voltage: Un 240/415V, 50...60Hz^
- Breaking capacity: 10kA as per IS/IEC 60898-1
- With ISI marking: CM/L No. 2255548

10000A	Rated Current I_n (A)	MW#	Reference No	Unit MRP* ₹	Std. Pkg.** (Nos.)
1P, 240/415V AC 	0.5	1	5SL41057RC	1212.-	1/12
	2		■ 5SL41027RC	848.-	1/12
	3		5SL41037RC	848.-	1/12
	4		5SL41047RC	848.-	1/12
	6		■ 5SL41067RC	549.-	1/12
	8		5SL41087RC	549.-	1/12
	10		■ 5SL41107RC	549.-	1/12
	13		5SL41137RC	549.-	1/12
	16		■ 5SL41167RC	549.-	1/12
	20		■ 5SL41207RC	549.-	1/12
	25		5SL41257RC	549.-	1/12
	32		■ 5SL41327RC	549.-	1/12
	40		5SL41407RC	1197.-	1/12
	50		5SL41507RC	1233.-	1/12
	63		5SL41637RC	1233.-	1/12
2P, 415V AC 	0.5	2	5SL42057RC	3117.-	1/6
	2		■ 5SL42027RC	2638.-	1/6
	3		5SL42037RC	2638.-	1/6
	4		■ 5SL42047RC	2638.-	1/6
	6		■ 5SL42067RC	1891.-	1/6
	8		5SL42087RC	1891.-	1/6
	10		■ 5SL42107RC	1891.-	1/6
	13		5SL42137RC	1891.-	1/6
	16		■ 5SL42167RC	1891.-	1/6
	20		■ 5SL42207RC	1891.-	1/6
	25		5SL42257RC	1891.-	1/6
	32		5SL42327RC	1891.-	1/6
	40		5SL42407RC	3049.-	1/6
	50		5SL42507RC	3049.-	1/6
	63		5SL42637RC	3049.-	1/6
3P, 415V AC 	0.5	3	5SL43057RC	5036.-	1/4
	2		5SL43027RC	4261.-	1/4
	3		5SL43037RC	4261.-	1/4
	4		5SL43047RC	4261.-	1/4
	6		■ 5SL43067RC	3176.-	1/4
	8		5SL43087RC	3176.-	1/4
	10		■ 5SL43107RC	3176.-	1/4
	13		5SL43137RC	3176.-	1/4
	16		■ 5SL43167RC	3176.-	1/4
	20		■ 5SL43207RC	3176.-	1/4
	25		5SL43257RC	3176.-	1/4
	32		■ 5SL43327RC	3176.-	1/4
	40		5SL43407RC	4805.-	1/4
	50		5SL43507RC	4805.-	1/4
	63		■ 5SL43637RC	4805.-	1/4
4P, 415V AC 	0.5	4	5SL44057RC	6330.-	1/3
	2		5SL44027RC	5356.-	1/3
	3		5SL44037RC	5356.-	1/3
	4		5SL44047RC	5356.-	1/3
	6		5SL44067RC	4396.-	1/3
	8		5SL44087RC	4396.-	1/3
	10		5SL44107RC	4396.-	1/3
	13		5SL44137RC	4396.-	1/3
	16		5SL44167RC	4396.-	1/3
	20		5SL44207RC	4396.-	1/3
	25		5SL44257RC	4396.-	1/3
	32		■ 5SL44327RC	4396.-	1/3
	40		5SL44407RC	5996.-	1/3
	50		5SL44507RC	5996.-	1/3
	63		■ 5SL44637RC	5996.-	1/3

■ Stock items

Note: * MRP - Maximum Retail Price # 1MW (Module Width) = 18mm

** Purchase MOQ for our authorized dealers is in multiples of standard packing, contact Siemens Sales Office for further details

^ Suitable for DC networks in Telecom application; 60V DC for 1P & 110V DC for 2P (contact Sales Office for connection diagram)

Betagard Miniature Circuit Breakers
5SL7, with C characteristics

IS/IEC 60898 - 1
CM/L No. 2255548

- **Standards: IS/IEC 60898-1:2015**
- **Voltage: Un 240/415V, 50...60Hz**
- **Breaking capacity: 15kA[1)] as per IS/IEC 60898-1**
- **With ISI marking: CM/L No. 2255548**

	Rated Current I_n (A)	MW#	Reference No	Unit MRP* ₹	Std. Pkg.** (Nos.)
1P, 240/415V AC	0.5	1	5SL71057RC	1390.-	1/12
	1		5SL71017RC	970.-	1/12
	2		5SL71027RC	955.-	1/12
	4		5SL71047RC	955.-	1/12
	6		5SL71067RC	820.-	1/12
	10		5SL71107RC	820.-	1/12
	16		5SL71167RC	820.-	1/12
	20		5SL71207RC	820.-	1/12
	25		5SL71257RC	820.-	1/12
	32		5SL71327RC	820.-	1/12
	40		5SL71407RC	1290.-	1/12
	50		5SL71507RC	1300.-	1/12
	63		5SL71637RC	1300.-	1/12
2P, 415V AC	0.5	2	5SL72057RC	3420.-	1/6
	1		5SL72017RC	2895.-	1/6
	2		5SL72027RC	2835.-	1/6
	4		5SL72047RC	2835.-	1/6
	6		5SL72067RC	2065.-	1/6
	10		5SL72107RC	2065.-	1/6
	16		5SL72167RC	2065.-	1/6
	20		5SL72207RC	2065.-	1/6
	25		5SL72257RC	2065.-	1/6
	32		5SL72327RC	2065.-	1/6
	40		5SL72407RC	3110.-	1/6
	50		5SL72507RC	3110.-	1/6
	63		5SL72637RC	3110.-	1/6
3P, 415V AC	0.5	3	5SL73057RC	5235.-	1/4
	1		5SL73017RC	4430.-	1/4
	2		5SL73027RC	4350.-	1/4
	4		5SL73047RC	4350.-	1/4
	6		5SL73067RC	3285.-	1/4
	10		5SL73107RC	3285.-	1/4
	16		5SL73167RC	3285.-	1/4
	20		5SL73207RC	3285.-	1/4
	25		5SL73257RC	3285.-	1/4
	32		5SL73327RC	3285.-	1/4
	40		5SL73407RC	4895.-	1/4
	50		5SL73507RC	4895.-	1/4
	63		5SL73637RC	4895.-	1/4
4P, 415V AC	0.5	4	5SL74057RC	6600.-	1/3
	1		5SL74017RC	5585.-	1/3
	2		5SL74027RC	5485.-	1/3
	4		5SL74047RC	5485.-	1/3
	6		5SL74067RC	4390.-	1/3
	10		5SL74107RC	4390.-	1/3
	16		5SL74167RC	4390.-	1/3
	20		5SL74207RC	4390.-	1/3
	25		5SL74257RC	4390.-	1/3
	32		5SL74327RC	4390.-	1/3
	40		5SL74407RC	6155.-	1/3
	50		5SL74507RC	6155.-	1/3
	63		5SL74637RC	6155.-	1/3

Note:
* MRP - Maximum Retail Price # 1MW (Module Width) = 18mm
** Purchase MOQ for our authorized dealers is in multiples of standard packing, contact Siemens Sales Office for further details
[1)] Breaking capacity 63A - 10kA

Betagard Miniature Circuit Breakers
5SL7, with D characteristics

IS/IEC 60898 - 1
CM/L No. 2255548

- Standards: IS/IEC 60898-1
- Voltage: Un 240/415V, 50...60Hz
- Breaking capacity: 15kA[1)] as per IS/IEC 60898-1
- With ISI marking: CM/L No. 2255548

	Rated Current I_n (A)	MW#	Reference No	Unit MRP* ₹	Std. Pkg.** (Nos.)
1P, 240/415V AC 	0.5	1	5SL71058RC	980.-	1/12
	1		5SL71018RC	980.-	1/12
	2		5SL71028RC	955.-	1/12
	4		5SL71048RC	955.-	1/12
	6		5SL71068RC	850.-	1/12
	10		5SL71108RC	850.-	1/12
	16		5SL71168RC	850.-	1/12
	20		5SL71208RC	850.-	1/12
	25		5SL71258RC	850.-	1/12
	32		5SL71328RC	850.-	1/12
	40		5SL71408RC	1660.-	1/12
	50		5SL71508RC	1660.-	1/12
	63		5SL71638RC	1660.-	1/12
2P, 415V AC 	0.5	2	5SL72058RC	2935.-	1/6
	1		5SL72018RC	2935.-	1/6
	2		5SL72028RC	2835.-	1/6
	4		5SL72048RC	2835.-	1/6
	6		5SL72068RC	2185.-	1/6
	10		5SL72108RC	2185.-	1/6
	16		5SL72168RC	2185.-	1/6
	20		5SL72208RC	2185.-	1/6
	25		5SL72258RC	2185.-	1/6
	32		5SL72328RC	2185.-	1/6
	40		5SL72408RC	4015.-	1/6
	50		5SL72508RC	4015.-	1/6
	63		5SL72638RC	4015.-	1/6
3P, 415V AC 	0.5	3	5SL73058RC	4515.-	1/4
	1		5SL73018RC	4515.-	1/4
	2		5SL73028RC	4350.-	1/4
	4		5SL73048RC	4350.-	1/4
	6		5SL73068RC	3455.-	1/4
	10		5SL73108RC	3455.-	1/4
	16		5SL73168RC	3455.-	1/4
	20		5SL73208RC	3455.-	1/4
	25		5SL73258RC	3455.-	1/4
	32		5SL73328RC	3455.-	1/4
	40		5SL73408RC	6255.-	1/4
	50		5SL73508RC	6255.-	1/4
	63		5SL73638RC	6255.-	1/4
4P, 415V AC 	0.5	4	5SL74058RC	5775.-	1/3
	1		5SL74018RC	5775.-	1/3
	2		5SL74028RC	5570.-	1/3
	4		5SL74048RC	5570.-	1/3
	6		5SL74068RC	4560.-	1/3
	10		5SL74108RC	4560.-	1/3
	16		5SL74168RC	4560.-	1/3
	20		5SL74208RC	4560.-	1/3
	25		5SL74258RC	4560.-	1/3
	32		5SL74328RC	4560.-	1/3
	40		5SL74408RC	7860.-	1/3
	50		5SL74508RC	7860.-	1/3
	63		5SL74638RC	7860.-	1/3

Note:
* MRP - Maximum Retail Price # 1MW (Module Width) = 18mm
** Purchase MOQ for our authorized dealers is in multiples of standard packing, contact Siemens Sales Office for further details
[1)] Breaking capacity 40A - 63A: 10kA

DISCOVER THE POWER OF **SIMPLICITY**

SINOPLUS 5TJ MCB

NEW


IEC Safe
Complies with IEC standards

Comprehensive range
For various applications

Reliable
Siemens trusted quality

RoHS compliance
Environmentally friendly



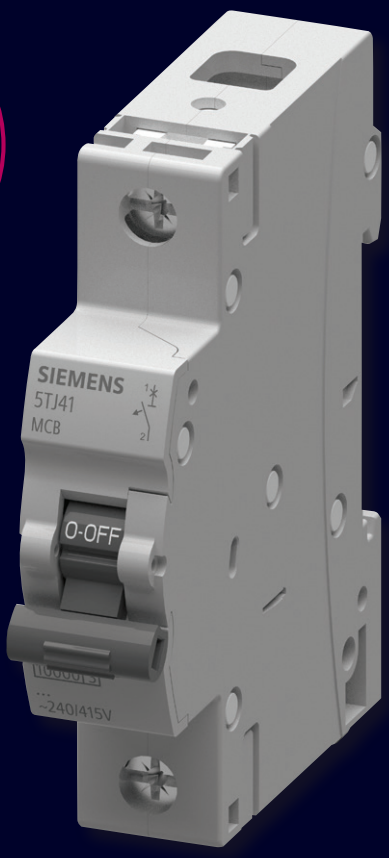

www.siemens.co.in

SIEMENS

DISCOVER THE POWER OF **SIMPLICITY**

SINOPLUS low-voltage electrical products

Cost-effective
Best price performance ratio

Comprehensive range
For various applications

Reliable
Siemens trusted quality

IEC **Safe**
Complies with IEC standards



www.siemens.co.in

SIEMENS



5SL Circuit Breaker - K & Z Curve

"K" Characteristic Trip Curve:

MCB trips instantaneously when the current flowing through it reaches between 10 to 14 times the rated current.

Suitable for inductive and motor loads with high inrush currents and more.

"Z" Characteristic Trip Curve:

MCB trips when the current flowing through it reaches between 2 to 3 times the rated current, highly sensitive to short circuit current.

Suitable for the protection of highly sensitive devices such as semiconductor devices,

- In compliance with standards IEC 60947-2
- Range available from 2A – 63A
- Comprehensive features & accessories in line with 5SL MCB
- For protection in Industrial, Infrastructure, Process Automation, Commercial applications

www.siemens.co.in

SIEMENS

Betagard Circuit Breakers
5SL7, with K characteristics

L - 7500266715

- **Standards: IS/IEC 60947-2:2016**
- **Voltage: Un 240/415V, 50...60Hz**
- **Breaking capacity (Icu): 15kA[1] as per IS/IEC 60947-2**

	Rated Current I_n (A)	MW#	Reference No	Unit MRP* ₹	Std. Pkg.** (Nos.)
1P, 240/415V AC	2	1	**5SL71023RC**	**850.-**	**1/12**
	4		**5SL71043RC**	**850.-**	**1/12**
	6		**5SL71063RC**	**760.-**	**1/12**
	10		**5SL71103RC**	**755.-**	**1/12**
	16		**5SL71163RC**	**760.-**	**1/12**
	20		**5SL71203RC**	**755.-**	**1/12**
	25		**5SL71253RC**	**760.-**	**1/12**
	32		**5SL71323RC**	**760.-**	**1/12**
	40		**5SL71403RC**	**1335.-**	**1/12**
	63		**5SL71633RC**	**1570.-**	**1/12**
2P, 415V AC	2	2	**5SL72023RC**	**2710.-**	**1/6**
	4		**5SL72043RC**	**2710.-**	**1/6**
	6		**5SL72063RC**	**2520.-**	**1/6**
	10		**5SL72103RC**	**2460.-**	**1/6**
	16		**5SL72163RC**	**2520.-**	**1/6**
	20		**5SL72203RC**	**2460.-**	**1/6**
	25		**5SL72253RC**	**2520.-**	**1/6**
	32		**5SL72323RC**	**2520.-**	**1/6**
	40		**5SL72403RC**	**3035.-**	**1/6**
	63		**5SL72633RC**	**3495.-**	**1/6**
3P, 415V AC	2	3	**5SL73023RC**	**4220.-**	**1/4**
	4		**5SL73043RC**	**4220.-**	**1/4**
	6		**5SL73063RC**	**3860.-**	**1/4**
	10		**5SL73103RC**	**3780.-**	**1/4**
	16		**5SL73163RC**	**3860.-**	**1/4**
	20		**5SL73203RC**	**3780.-**	**1/4**
	25		**5SL73253RC**	**3860.-**	**1/4**
	32		**5SL73323RC**	**3860.-**	**1/4**
	40		**5SL73403RC**	**4295.-**	**1/4**
	63		**5SL73633RC**	**4825.-**	**1/4**
4P, 415V AC	2	4	**5SL74023RC**	**5385.-**	**1/3**
	4		**5SL74043RC**	**5385.-**	**1/3**
	6		**5SL74063RC**	**5090.-**	**1/3**
	10		**5SL74103RC**	**4970.-**	**1/3**
	16		**5SL74163RC**	**5090.-**	**1/3**
	20		**5SL74203RC**	**4970.-**	**1/3**
	25		**5SL74253RC**	**5090.-**	**1/3**
	32		**5SL74323RC**	**5090.-**	**1/3**
	40		**5SL74403RC**	**5550.-**	**1/3**
	63		**5SL74633RC**	**6245.-**	**1/3**

Note:
* MRP - Maximum Retail Price # 1MW (Module Width) = 18mm
** Purchase MOQ for our authorized dealers is in multiples of standard packing, contact Siemens Sales Office for further details
[1] Breaking capacity 40A - 63A: 10kA

Betagard Circuit Breakers
5SL4, with Z characteristics

L - 7500266715

- **Standards: IS/IEC 60947-2:2016**
- **Voltage: Un 240/415V, 50...60Hz**
- **Breaking capacity (Icu): 10kA as per IS/IEC 60947-2**

	Rated Current I_n (A)	MW#	Reference No	Unit MRP* ₹	Std. Pkg.** (Nos.)
1P, 240/415V AC	2	1	**5SL41020RC**	**1166.-**	**1/12**
	4		**5SL41040RC**	**1166.-**	**1/12**
	6		**5SL41060RC**	**916.-**	**1/12**
	10		**5SL41100RC**	**916.-**	**1/12**
	16		**5SL41160RC**	**916.-**	**1/12**
	20		**5SL41200RC**	**916.-**	**1/12**
	25		**5SL41250RC**	**916.-**	**1/12**
	32		**5SL41320RC**	**916.-**	**1/12**
	40		**5SL41400RC**	**1206.-**	**1/12**
	63		**5SL41630RC**	**1206.-**	**1/12**
2P, 415V AC	2	2	**5SL42020RC**	**2397.-**	**1/6**
	4		**5SL42040RC**	**2397.-**	**1/6**
	6		**5SL42060RC**	**2262.-**	**1/6**
	10		**5SL42100RC**	**2262.-**	**1/6**
	16		**5SL42160RC**	**2262.-**	**1/6**
	20		**5SL42200RC**	**2262.-**	**1/6**
	25		**5SL42250RC**	**2262.-**	**1/6**
	32		**5SL42320RC**	**2262.-**	**1/6**
	40		**5SL42400RC**	**2624.-**	**1/6**
	63		**5SL42630RC**	**2624.-**	**1/6**
3P, 415V AC	2	3	**5SL43020RC**	**3798.-**	**1/4**
	4		**5SL43040RC**	**3798.-**	**1/4**
	6		**5SL43060RC**	**3164.-**	**1/4**
	10		**5SL43100RC**	**3164.-**	**1/4**
	16		**5SL43160RC**	**3164.-**	**1/4**
	20		**5SL43200RC**	**3164.-**	**1/4**
	25		**5SL43250RC**	**3164.-**	**1/4**
	32		**5SL43320RC**	**3164.-**	**1/4**
	40		**5SL43400RC**	**3980.-**	**1/4**
	63		**5SL43630RC**	**3980.-**	**1/4**
4P, 415V AC	2	4	**5SL44020RC**	**4115.-**	**1/3**
	4		**5SL44040RC**	**4115.-**	**1/3**
	6		**5SL44060RC**	**3574.-**	**1/3**
	10		**5SL44100RC**	**3574.-**	**1/3**
	16		**5SL44160RC**	**3574.-**	**1/3**
	20		**5SL44200RC**	**3574.-**	**1/3**
	25		**5SL44250RC**	**3574.-**	**1/3**
	32		**5SL44320RC**	**3574.-**	**1/3**
	40		**5SL44400RC**	**4486.-**	**1/3**
	63		**5SL44630RC**	**4486.-**	**1/3**

Note:
* MRP - Maximum Retail Price # 1MW (Module Width) = 18mm
** Purchase MOQ for our authorized dealers is in multiples of standard packing, contact Siemens Sales Office for further details

Betagard Miniature Circuit Breakers
5SP4, with C/D characteristics

IS/IEC 60898 - 1
CM/L No. 2255548

- Standards: IS/IEC 60898-1:2015
- Voltage: Un 240/415V
- Breaking capacity: 10kA as per IS/IEC 60898-1:2015
- With ISI marking: CM/L No. 2255548

C characteristic

10000A		Rated Current I_n (A)	MW#	Reference No	Unit MRP* ₹	Std. Pkg.** (Nos.)
	1-pole	80 100 125	1.5	5SP41807RC 5SP41917RC 5SP41927RC	6445.- 6795.- 7710.-	1/10 1/10 1/10
	2-pole	80 100 125	3	5SP42807RC 5SP42917RC 5SP42927RC	12650.- 13330.- 15090.-	1/5 1/5 1/5
	3-pole	80 100 125	4.5	5SP43807RC 5SP43917RC 5SP43927RC	19745.- 20270.- 23225.-	1/1 1/1 1/1
	4-pole	80 100 125	6	5SP44807RC 5SP44917RC 5SP44927RC	28325.- 29140.- 33175.-	1/1 1/1 1/1

D characteristic

	1-pole	80 100	1.5	5SP41808RC 5SP41918RC	7095.- 7435.-	1/10 1/10
	2-pole	80 100	3	5SP42808RC 5SP42918RC	14245.- 15100.-	1/5 1/5
	3-pole	80 100	4.5	5SP43808RC 5SP43918RC	21935.- 22165.-	1/1 1/1
	4-pole	80 100	6	5SP44808RC 5SP44918RC	30850.- 31640.-	1/1 1/1

Betagard Isolators 5TL1

- Standard: IS/IEC 60947-3
- Voltage: 440V AC

		Rated Current I_n (A)	MW#	Reference No	Unit MRP* ₹	Std. Pkg.** (Nos.)
	2-pole	40 63 80 100 125	2	5TL12400 5TL12630 5TL12800 5TL12910 5TL12920	1435.- 1885.- 2475.- 3135.- 3280.-	1/1 1/1 1/1 1/1 1/1
	3-pole	40 63 80 100 125	3	5TL13400 5TL13630 5TL13800 5TL13910 5TL13920	2660.- 2990.- 3615.- 3800.- 4105.-	1/1 1/1 1/1 1/1 1/1
	4-pole	40 63 80 100 125	4	5TL14400 5TL14630 5TL14800 5TL14910 5TL14920	3125.- 3560.- 4290.- 5150.- 5570.-	1/1 1/1 1/1 1/1 1/1

Note:
* MRP - Maximum Retail Price
** Purchase MOQ for our authorized dealers is in multiples of standard packing, contact Siemens Sales Office for further details

Betagard Circuit Breakers
5SL5, DC with C Characteristics

- **Standards: IS/IEC 60947-2:2016**
- **Voltage: 220V DC/1P, 440V DC/2P & 880V DC/4P ^**
- **Breaking capacity: 10kA as per IS/IEC 60947-2**

10000A	Rated Current I_n (A)	MW#	Reference No	Unit MRP* ₹	Std. Pkg.** (Nos.)
1P, 220V DC 	0.5	1	5SL51057RC	2085.-	1/12
	1		5SL51017RC	1530.-	1/12
	2		5SL51027RC	1650.-	1/12
	3		5SL51037RC	1725.-	1/12
	4		5SL51047RC	1650.-	1/12
	6		5SL51067RC	1395.-	1/12
	8		5SL51087RC	1480.-	1/12
	10		5SL51107RC	1395.-	1/12
	16		5SL51167RC	1395.-	1/12
	20		5SL51207RC	1395.-	1/12
	25		5SL51257RC	1395.-	1/12
	32		5SL51327RC	1395.-	1/12
	40		5SL51407RC	2095.-	1/12
	50		5SL51507RC	2095.-	1/12
	63		5SL51637RC	2095.-	1/12
2P, 440V DC 	0.5	2	5SL52057RC	3935.-	1/6
	1		5SL52017RC	3330.-	1/6
	2		5SL52027RC	3330.-	1/6
	3		5SL52037RC	3485.-	1/6
	4		5SL52047RC	3330.-	1/6
	6	■	5SL52067RC	2915.-	1/6
	8		5SL52087RC	3065.-	1/6
	10	■	5SL52107RC	2915.-	1/6
	16	■	5SL52167RC	2915.-	1/6
	20		5SL52207RC	2915.-	1/6
	25		5SL52257RC	2915.-	1/6
	32		5SL52327RC	2915.-	1/6
	40		5SL52407RC	4310.-	1/6
	50		5SL52507RC	4310.-	1/6
	63		5SL52637RC	4310.-	1/6
4P, 880V DC[1)] 	6	4	5SL54067RC	5895.-	1/3
	10		5SL54107RC	5895.-	1/3
	16		5SL54167RC	5895.-	1/3
	25		5SL54257RC	6270.-	1/3
	32		5SL54327RC	6270.-	1/3
	40		5SL54407RC	7370.-	1/3
	63		5SL54637RC	7730.-	1/3

■ Stock items

1) Maximum operational voltage 1000V DC Maximum

^ For connection diagram, contact Siemens Sales Office for further details.

- **Also available DC Circuit Breakers for Solar applications - contact Siemens Sales Office for further details.**

Note:

* MRP - Maximum Retail Price # 1MW (Module Width) = 18mm

** Purchase MOQ for our authorized dealers is in multiples of standard packing, contact Siemens Sales Office for further details

Betagard 5SV
Residual Current Circuit Breakers



+

In the event of a fault, residual current protective devices reliably disconnect power to protect humans

Fault protection
"Protection against indirect contact"

Protects people in the event of contact with electrically conductive parts, if a risk exists as a result of a fault due to the magnitude or duration of the touch voltage



Additional protection
"Protection in case of direct contact" with $I_{\Delta n}$ = 30mA

Protects individuals if they come in direct contact with an active live part under normal operating condition



Fire protection
"Protection from insulation faults" with $I_{\Delta n}$ = 300mA

For the prevention of fires which can be caused by insulation faults in locations exposed to fire hazards



Surge current withstand capability
"Protection surge currents" with 8/20µs >1000 Amp

For Type "A" have a surge current capability to avoid nuisance tripping

RoHS COMPLIANT

www.siemens.co.in

SIEMENS

Betagard Residual Current Circuit Breakers 5SV

IS 12640 Part 1
CM/L No. 7676092

- Standards: IS 12640 (Part 1):2016/ IEC 61008-1:2012
- Voltage: 240/415V AC, 50Hz
- With ISI marking: CM/L No. 7676092

Type AC, applicable in networks for AC residual currents

		Rated residual current I Δn (mA)	Rated Current I_n (A)	MW#	Reference No	Unit MRP* ₹	Std. Pkg.** (Nos.)
	2 Pole	30	25	2	■ 5SV43120RC	6035.-	1
		100	25		5SV44120RC	6605.-	1
		300	25		5SV46120RC	6830.-	1
		30	40		■ 5SV43140RC	7075.-	1
		100	40		5SV44140RC	7745.-	1
		300	40		5SV46140RC	8040.-	1
		30	63		■ 5SV43160RC	9465.-	1
		100	63		5SV44160RC	9985.-	1
		300	63		5SV46160RC	10615.-	1
		30	80		5SV43170RC	15325.-	1
		100	80		5SV44170RC	15940.-	1
		300	80		5SV46170RC	15940.-	1
	4 Pole	30	25	4	■ 5SV43420RC	8470.-	1
		100	25		5SV44420RC	8785.-	1
		300	25		5SV46420RC	9105.-	1
		30	40		■ 5SV43440RC	8570.-	1
		100	40		5SV44440RC	8900.-	1
		300	40		5SV46440RC	9245.-	1
		30	63		■ 5SV43460RC	9985.-	1
		100	63		5SV44460RC	10390.-	1
		300	63		5SV46460RC	10755.-	1
		30	80		5SV43470RC	15325.-	1
		100	80		5SV44470RC	15940.-	1
		300	80		5SV46470RC	15940.-	1

Type A, applicable in networks with AC and/or pulsating DC residual currents

	2 Pole	30	25	2	5SV33126RC	11565.-	1
		100	25		5SV34126RC	13635.-	1
		300	25		5SV36126RC	13635.-	1
		30	40		5SV33146RC	13125.-	1
		100	40		5SV34146RC	13660.-	1
		300	40		5SV36146RC	13660.-	1
		30	63		5SV33166RC	19075.-	1
		100	63		5SV34166RC	19620.-	1
		300	63		5SV36166RC	18680.-	1
		30	80		5SV33176RC	20520.-	1
		100	80		5SV34176RC	22065.-	1
		300	80		5SV36176RC	21015.-	1
	4 Pole	30	25	4	5SV33426RC	13710.-	1
		100	25		5SV34426RC	16925.-	1
		300	25		5SV36426RC	16925.-	1
		30	40		5SV33446RC	15290.-	1
		100	40		5SV34446RC	17090.-	1
		300	40		5SV36446RC	16925.-	1
		30	63		5SV33466RC	17305.-	1
		100	63		5SV34466RC	17190.-	1
		300	63		5SV36466RC	17190.-	1
		30	80		5SV33476RC	20795.-	1
		100	80		5SV34476RC	22065.-	1
		300	80		5SV36476RC	21015.-	1

■ Stock items

Note:

* MRP - Maximum Retail Price # 1MW (Module Width) = 18mm

** Purchase MOQ for our authorized dealers is in multiples of standard packing, contact Siemens Sales Office for further details

SENTRON 5SM2
Residual Current Units





RC Units suitable with 5SL7..RC MCBs for complete protection from Residual Current, Overload and Short circuit faults

Wide portfolio catering to various applications

Easy and fast installation

Conforming to
- IEC/EN 61009-1
- IEC/EN 61009-2-1
- IEC/EN 61543

Reduced inventory with range up to 63A in two variants only

RoHS compliant

www.siemens.co.in

SIEMENS

SENTRON Residual Current Units 5SM2

- Standards: In accordance with IEC/EN 61009-1 (VDE 0664-20), IEC/EN 61009-2-1 (VDE 0664-21), IEC/EN 61543 (VDE 0664-30)
- Voltage: 240/415V AC, 50Hz

Type AC, applicable in networks for AC residual currents

	Number of poles	Mounting width MW#	Rated residual current IΔn [mA]	RC Unit-Current Rating [A]	5SL7..RC MCBs- Rated current [A]	Reference No	Unit LP* ₹	Std. Pkg.** (Nos.)
	2	2	10	40	2- 40	5SM21210RC	6835.-	1
			30	40	2- 40	■ 5SM23220RC	6060.-	1
				63	2- 63	5SM23250RC	9955.-	1
			100	40	2- 40	5SM24220RC	7470.-	1
				63	2- 63	5SM24250RC	10840.-	1
			300	40	2- 40	■ 5SM26220RC	7470.-	1
				63	2- 63	5SM26250RC	10840.-	1
	3	3	30	40	2- 40	5SM23320RC	6820.-	1
				63	2- 63	5SM23350RC	10280.-	1
			100	40	2- 40	5SM24320RC	8130.-	1
				63	2- 63	5SM24350RC	11200.-	1
			300	40	2- 40	5SM26320RC	8485.-	1
				63	2- 63	5SM26350RC	11455.-	1
	4	3	30	40	2- 40	■ 5SM23420RC	7415.-	1
				63	2- 63	■ 5SM23450RC	10280.-	1
			100	40	2- 40	5SM24420RC	8650.-	1
				63	2- 63	5SM24450RC	11200.-	1
			300	40	2- 40	5SM26420RC	9015.-	1
				63	2- 63	5SM26450RC	11455.-	1

Type A, applicable in networks with AC and/or pulsating DC residual currents

	Number of poles	Mounting width MW#	Rated residual current IΔn [mA]	RC Unit-Current Rating [A]	5SL7..RC MCBs- Rated current [A]	Reference No	Unit LP* ₹	Std. Pkg.** (Nos.)
	2	2	10	40	2- 40	5SM21216RC	6965.-	1
			30	40	2- 40	5SM23226RC	6070.-	1
				63	2- 63	5SM23256RC	10340.-	1
			100	40	2- 40	5SM24226RC	8130.-	1
				63	2- 63	5SM24256RC	10840.-	1
			300	40	2- 40	5SM26226RC	8485.-	1
				63	2- 63	5SM26256RC	10840.-	1
	3	3	30	40	2- 40	5SM23326RC	6885.-	1
				63	2- 63	5SM23356RC	10550.-	1
			100	40	2- 40	5SM24326RC	8225.-	1
				63	2- 63	5SM24356RC	11475.-	1
			300	40	2- 40	5SM26326RC	8570.-	1
				63	2- 63	5SM26356RC	11735.-	1
	4	3	30	40	2- 40	5SM23426RC	8270.-	1
				63	2- 63	5SM23456RC	10550.-	1
			100	40	2- 40	5SM24426RC	8980.-	1
				63	2- 63	5SM24456RC	11475.-	1
			300	40	2- 40	5SM26426RC	9365.-	1
				63	2- 63	5SM26456RC	11735.-	1

■ Stock items

Note: * LP - List Price # 1MW (Module Width) = 18mm

** Purchase MOQ for our authorized dealers is in multiples of standard packing, contact Siemens Sales Office for further details

Note: To be used along with 5SL7..RC MCBs. MCBs to be ordered separately. For MCB prices, refer Page no. 8 & 9 from this pricelist.

Accessories for Remote control mechanism units for 5SM2 RC Units

Remote control mechanism unit:
Adapter- Mount-on device for combination of RC Units 5SM2..RC and MCBs 5SL7..RC.

Item Description	Mounting width MW#	Reference No	Std. Pkg.** (Nos.)
RC Mech. Power- 5ST3055 & RC Mech. ARD*- 5ST3057 **For 2P-** 12 V -30 V AC 12 V -48V DC	2	**5ST3820-3 + 5ST3820-6**	**1**
RC Mech. Power- 5ST3055 & RC Mech. ARD*- 5ST3057 **For 3P & 4P-** 12 V -30 V AC 12 V -48V DC	2	**5ST3820-3 + 5ST3820-7**	**1**
RC Mech. Power- 5ST3056 & RC Mech. ARD*- 5ST3058 **For 2P-** 230 V AC	2	**5ST3820-3 + 5ST3820-6**	**1**
RC Mech. Power- 5ST3056 & RC Mech. ARD*- 5ST3058 **For 3P & 4P-** 230 V AC	2	**5ST3820-3 + 5ST3820-7**	**1**
RC Mech. Power- 5ST3070 **For 2P-** 12 V -30 V AC 12 V -48V DC	2	**5ST3820-3 + 5ST3820-6**	**1**
RC Mech. Power- 5ST3070 **For 3P & 4P-** 12 V -30 V AC 12 V -48V DC	2	**5ST3820-3 + 5ST3820-7**	**1**

*- Auto Reclose Device

1MW (Module Width) = 18mm

** Purchase MOQ for our authorized dealers is in multiples of standard packing, contact Siemens Sales Office for further details

Note: All accessories can be mounted on the right-hand side of the RC Unit+MCB assembled device.

Note: For pricing details of above mentioned MLFBs and for other 5SM2 accessories, Pl refer Page No. 24 of this Pricelist.

Betagard Residual Current Breaker Operators 5SU1, 10kA

IS 12640 Part 2
CM/L No. 7676193

- Standards: IS 12640, Part 2:2016/ IEC 61009-1:2012
- Voltage: 240/415V AC, 50Hz
- With ISI marking: CM/L No. 7676193

Type AC, with C Characteristics (in 2 module size)$

	Rated residual current I Δn (mA)	Rated Current I_n (A)	MW#	Reference No	Unit MRP* ₹	Std. Pkg.** (Nos.)
240V AC; 50Hz; 2 pole[1)] 	30	6	2	5SU13541RC06	10755.-	1
	30	10		5SU13541RC10	10755.-	1
	30	16		5SU13541RC16	10755.-	1
	30	20		5SU13541RC20	10755.-	1
	30	25		5SU13541RC25	10755.-	1
	30	32		5SU13541RC32	11290.-	1
	30	40		5SU13541RC40	13345.-	1
	300	6		5SU16541RC06	10945.-	1
	300	10		5SU16541RC10	10945.-	1
	300	16		5SU16541RC16	10945.-	1
	300	20		5SU16541RC20	10945.-	1
	300	25		5SU16541RC25	10945.-	1
	300	32		5SU16541RC32	11515.-	1
	300	40		5SU16541RC40	13605.-	1

Type AC with C characteristic

240V AC; 50Hz; 2 pole 	30	32	4	5SU13241RC32	12210.-	1
		40		5SU13241RC40	14225.-	1
		63		5SU13241RC63	16530.-	1
	100	32		5SU14241RC32	13475.-	1
		40		5SU14241RC40	15140.-	1
		63		5SU14241RC63	17655.-	1
	300	32		5SU16241RC32	13605.-	1
		40		5SU16241RC40	15290.-	1
		63		5SU16241RC63	17655.-	1
415V AC; 50Hz; 4 pole 	30	32	7	5SU13441RC32	16300.-	1
		40		5SU13441RC40	16600.-	1
		63		5SU13441RC63	19700.-	1
	100	32		5SU14441RC32	16505.-	1
		40		5SU14441RC40	16825.-	1
		63		5SU14441RC63	19335.-	1
	300	32		5SU16441RC32	16640.-	1
		40		5SU16441RC40	16960.-	1
		63		5SU16441RC63	19515.-	1

Type AC with D characteristic

240V AC; 50Hz; 2 pole 	30	32	4	5SU13242RC32	15740.-	1
		40		5SU13242RC40	17250.-	1
		63		5SU13242RC63	20790.-	1
	100	32		5SU14242RC32	19050.-	1
		40		5SU14242RC40	20850.-	1
		63		5SU14242RC63	23810.-	1
	300	32		5SU16242RC32	18610.-	1
		40		5SU16242RC40	20850.-	1
		63		5SU16242RC63	23835.-	1
415V AC; 50Hz; 4 pole 	30	32	7	5SU13442RC32	21560.-	1
		40		5SU13442RC40	21875.-	1
		63		5SU13442RC63	25955.-	1
	100	32		5SU14442RC32	23330.-	1
		40		5SU14442RC40	24375.-	1
		63		5SU14442RC63	27035.-	1
	300	32		5SU16442RC32	23055.-	1
		40		5SU16442RC40	24605.-	1
		63		5SU16442RC63	26465.-	1

Note: * MRP - Maximum Retail Price # 1MW (Module Width) = 18mm [1)] 1P+N variant
** Purchase MOQ for our authorized dealers is in multiples of standard packing, contact Siemens Sales Office for further details
$ For connecting accessories with 2P 2M RCBO add handle connector 5ST38051

Betagard Residual Current Breaker Operators
5SU1, 10kA

IS 12640 Part 2
CM/L No. 7676193

- Standards: IS 12640, Part 2:2016/ IEC 61009-1:2012
- Voltage: 240/415V AC, 50Hz
- With ISI marking: CM/L No. 7676193

Type A, with C Characteristics (in 2 module size)$

	Rated residual current I Δn (mA)	Rated Current I_n (A)	MW#	Reference No	Unit MRP* ₹	Std. Pkg.** (Nos.)
240V AC; 50Hz; 2 pole[1)] 	30	6	2	5SU13547RC06	19640.-	1
	30	10		5SU13547RC10	19640.-	1
	30	16		5SU13547RC16	19640.-	1
	30	20		5SU13547RC20	19640.-	1
	30	25		5SU13547RC25	19640.-	1
	30	32		5SU13547RC32	20530.-	1
	30	40		5SU13547RC40	24840.-	1
	300	6		5SU16547RC06	20220.-	1
	300	10		5SU16547RC10	20220.-	1
	300	16		5SU16547RC16	20220.-	1
	300	20		5SU16547RC20	20220.-	1
	300	25		5SU16547RC25	20220.-	1
	300	32		5SU16547RC32	21030.-	1
	300	40		5SU16547RC40	25360.-	1

Type A with C characteristic

240V AC; 50Hz; 2 pole 	30	32	4	5SU13247RC32	22120.-	1
		40		5SU13247RC40	24330.-	1
		63		5SU13247RC63	27520.-	1
	100	32		5SU14247RC32	23600.-	1
		40		5SU14247RC40	26220.-	1
		63		5SU14247RC63	29790.-	1
	300	32		5SU16247RC32	23600.-	1
		40		5SU16247RC40	26220.-	1
		63		5SU16247RC63	29790.-	1
415V AC; 50Hz; 4 pole 	30	32	7	5SU13447RC32	27065.-	1
		40		5SU13447RC40	28190.-	1
		63		5SU13447RC63	32250.-	1
	100	32		5SU14447RC32	29055.-	1
		40		5SU14447RC40	29600.-	1
		63		5SU14447RC63	33095.-	1
	300	32		5SU16447RC32	29055.-	1
		40		5SU16447RC40	30115.-	1
		63		5SU16447RC63	33605.-	1

Type A with D characteristic

240V AC; 50Hz; 2 pole 	30	32	4	5SU13248RC32	25800.-	1
		40		5SU13248RC40	29130.-	1
		63		5SU13248RC63	33140.-	1
	100	32		5SU14248RC32	27760.-	1
		40		5SU14248RC40	30875.-	1
		63		5SU14248RC63	35190.-	1
	300	32		5SU16248RC32	27760.-	1
		40		5SU16248RC40	30875.-	1
		63		5SU16248RC63	35190.-	1
415V AC; 50Hz; 4 pole 	30	32	7	5SU13448RC32	31950.-	1
		40		5SU13448RC40	32345.-	1
		63		5SU13448RC63	38155.-	1
	100	32		5SU14448RC32	33655.-	1
		40		5SU14448RC40	35960.-	1
		63		5SU14448RC63	39150.-	1
	300	32		5SU16448RC32	33655.-	1
		40		5SU16448RC40	35960.-	1
		63		5SU16448RC63	39155.-	1

Note: * MRP - Maximum Retail Price # 1MW (Module Width) = 18mm [1)] 1P+N variant
** Purchase MOQ for our authorized dealers is in multiples of standard packing, contact Siemens Sales Office for further details
$ **For connecting accessories with 2P 2M RCBO add handle connector 5ST38051**

Betagard Accessories

Accessories for 5SL / 5SY / 5SP MCBs, 5TL Isolators, 5SV RCCBs, 5SM2 RC Units and 5SU1 RCBOs

	Item Description	Reference No	Unit MRP* ₹	Std. Pkg.** (Nos.)
	**Aux contact block** (For 5SL/5SY/5SP4/5TL/5SV/5SU1/5SM2)			
	1NO+1NC	5ST3010[1)]	2530.-	12
	2NO	5ST3011[1)]	2585.-	1
	2NC	5ST3012[1)]	2585.-	1
	1CO	5ST3016[1)]	4100.-	1
	Fault signal contact (For 5SL/5SY/5SP4/5SV/5SU1/5SM2)			
	1NO+1NC	5ST3020[1)]	3725.-	1
	2NO	5ST3021[1)]	3785.-	1
	2NC	5ST3022[1)]	3785.-	1
	Shunt release (For 5SL5/5SL7/5SY/5SP4/5SV/5SU1/5SM2)			
	110...415V AC	5ST3030[1)]	10445.-	1/5
	24...48V DC	5ST3031[1)]	10445.-	1/5
	Auxiliary and fault signal changeover contact (5SL/5SY/5SP4/5TL/5SV/5SU1/5SM2)	5ST3062	12050.-	1
	Auxiliary switch - 1CO Fault contact - 1CO			
	**Undervoltage release** (For 5SL5/5SL7/5SY/5SP4/5SV/5SU1/5SM2)			
	With integrated aux. switch			
	230V AC	5ST3040[1)]	14025.-	1/5
	110V DC	5ST3041[1)]	14025.-	1/5
	24V DC	5ST3042[1)]	14025.-	1/5
	Without integrated aux. switch			
	230V AC	5ST3043[1)]	14025.-	1/5
	110V DC	5ST3044[1)]	14025.-	1/5
	24V DC	5ST3045[1)]	14025.-	1/5
	Remote control mechanism unit			
	Basic version for 5SL, 5SY, 5TL1 and 5SU1 (1P+N only)			
	(12-30)V AC & (12-48)V DC, 1.5MW	5ST3053	62555.-	1
	230V AC, 2MW	5ST3054	62555.-	1
	Power version for 5SL, 5SY, 5TL1, 5SU1 & 5SM2			
	(12-30)V AC & (12-48)V DC, 2MW	5ST3055	105865.-	1
	230V AC, 2MW	5ST3056	105865.-	1
	Power version for 5SM2 (12-30)V AC & (12-48)V DC, 2MW	5ST3070	123520.-	1
	Auto Reclose Device Version for 5SM2			
	(12-30)V AC & (12-48)V DC, 2MW	5ST3057	101375.-	1
	230V AC, 2MW	5ST3058	118835.-	1
	Adapter for Remote control mechanism (To be ordered along with 5ST305X basic unit)			
	For 5SL - 1P & 2P, 5SV - 4P and 5SM2- 2P	5ST38206	1320.-	1
	For 5SL - 3P & 4P and 5SM2 - 3P & 4P	5ST38207	1320.-	1
	For 5SY - 1P & 2P and For 5SU1^ - 2P, 4M	5ST38201	1320.-	1
	For 5SY - 3P & 4P and For 5SU1^ - 4P, 7M	5ST38202	1320.-	1
	For 5SU1 - 2P, 2M	5ST38205	1320.-	1
	^ Add-on block for 5SU1 & 5SM2 to be ordered along with Adapter	5ST38203	2875.-	1
	**Handle locking device**			
	for 5SP and 5SY circuit breakers for padlock with max. 3mm shackle	5ST3801	1305.-	1
	for 5SL circuit breakers, 5TL1 isolators and 5SV residual current circuit breakers for padlock with max. 3 to 6 mm shackle	5ST3806	1230.-	5
	Pad locks for 5ST3801 and 5ST3806 handle locking devices	5ST3802	835.-	5
	Handle connector for 2P, 2M 5SU1 RCBO[$] (1set = 5 units in poly bag)	5ST38051	2595.-	1

Betagard Rotary Handle Assembly

	Item Description	Reference No.	Unit MRP* ₹	Std. Pkg.** (Nos.)
	Rotary Handle Assembly for 5SY, 5SL, 5SP and 5TL1 series of MCBs/ Isolators[$$]	5ST38140RC	4655.-	1

Note: * MRP - Maximum Retail Price # 1MW (Module Width) = 18mm

$ For 2P, 2M RCBOs, the accessories can be used along with Handle connector only

$$ Not suitable for 1P variants 1) Suffix **–ZI91** will be added for internal ordering

** Purchase MOQ for our authorized dealers is in multiples of standard packing, contact Siemens Sales Office for further details

Sinova Opulenz

Multitasking switches for multitasking homes.

Elegant
finishes to enhance the look of your home.

Premium colours and textures
to complement modern finishes on your walls.

Antibacterial switches
for a safe home.

ISI certified
for assured safety.

Environment friendly
RoHS compliant switches.

Comprehensive communication range
type tested as per standards ensuring higher reliability.






When homes and offices multitask as online classrooms, home offices, private theaters and more, the Opulenz range multitasks to help you make the most of them. Sinova Opulenz is a complete range of new age sockets, HDMI receptors, LAN ports, regulators and dimmers in seven exciting colours and two natural textures.



SIEMENS

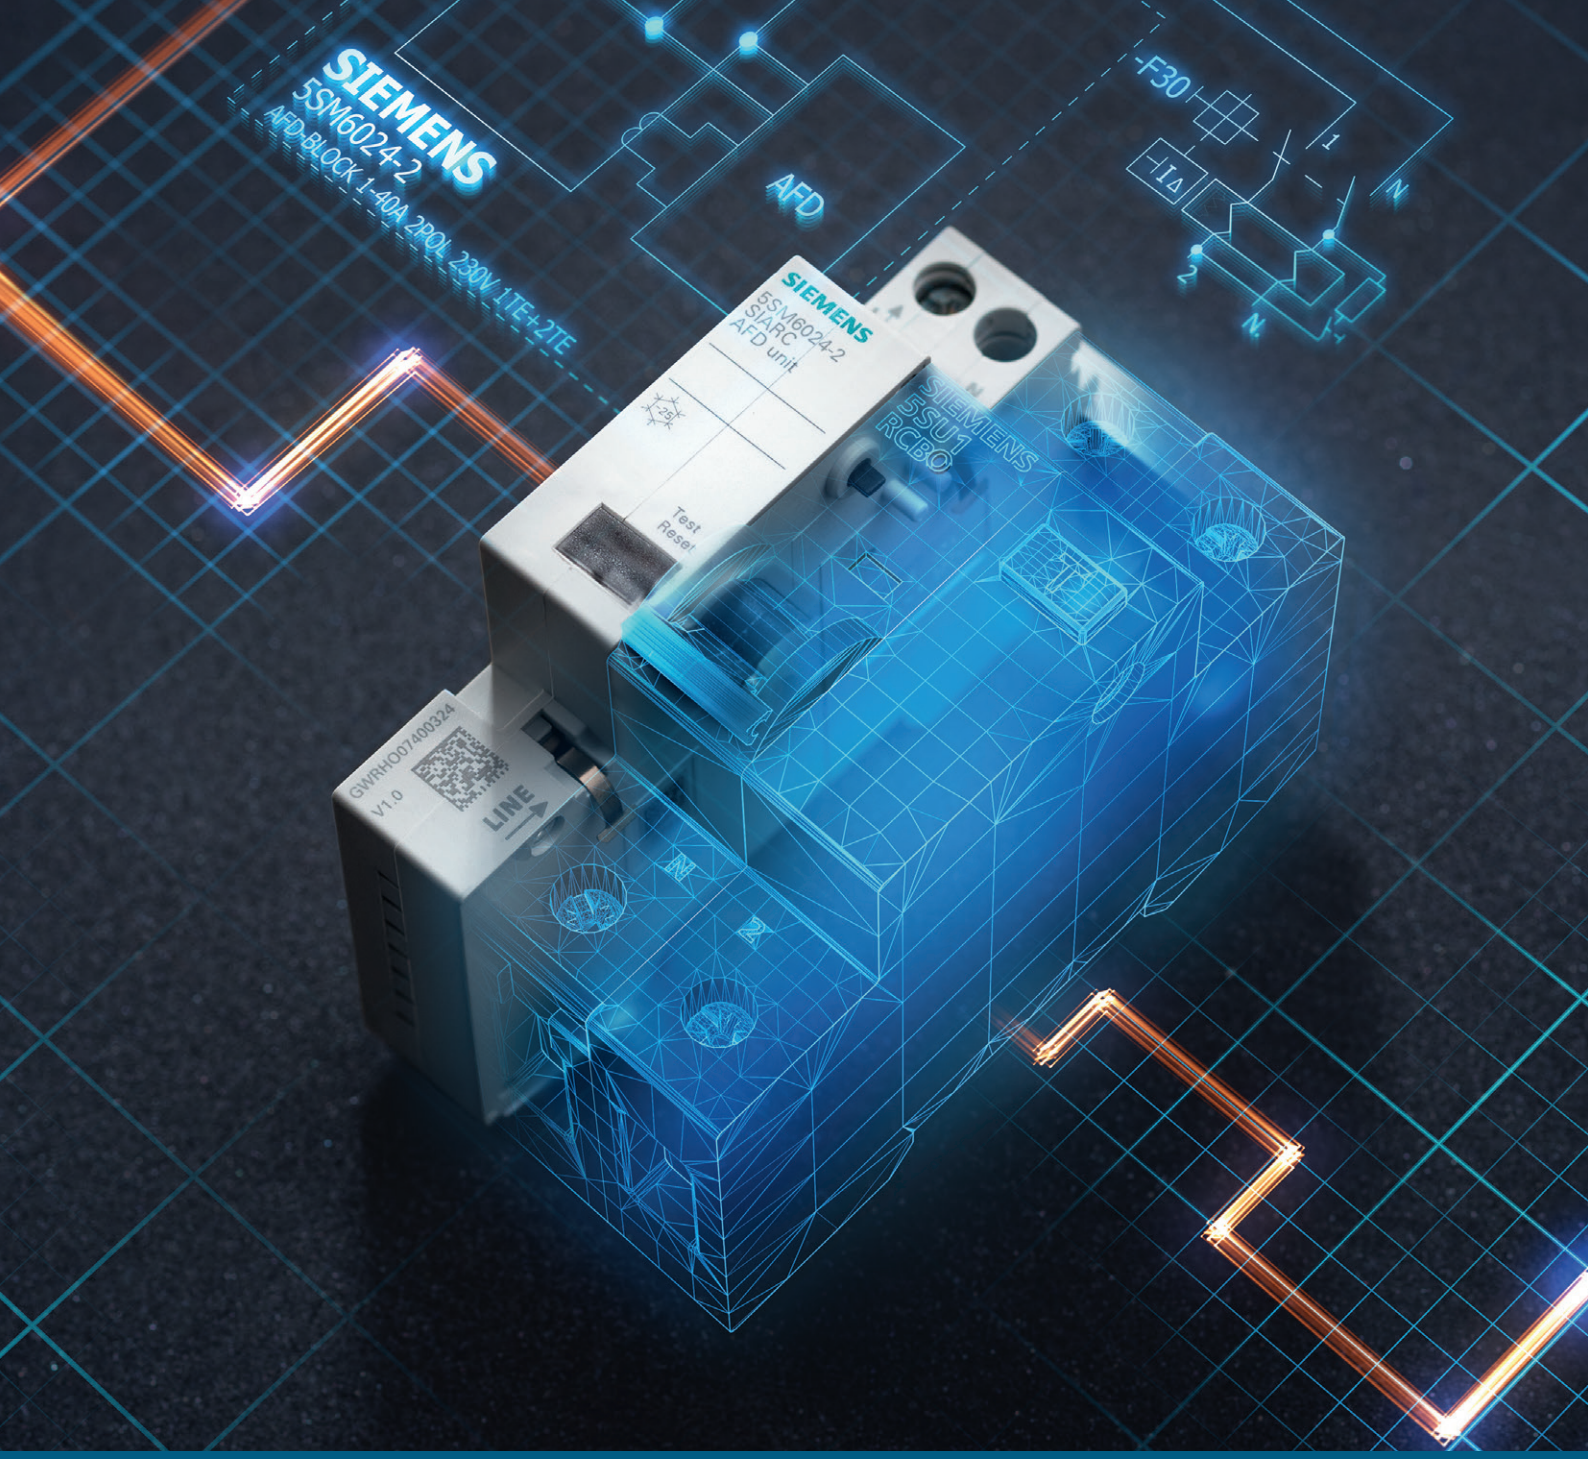

Arc Fault Detection Device


It's Time to Act Now!

With the 5SV6 Arc Fault Detection Device (AFDD), Siemens presents the third generation of fire-prevention product. The 5SV6 Arc Fault Detection Device with integrated miniature circuit breaker (MCB) is the first device on the IEC market with just one module width and is the smallest of its kind worldwide.

A standard-compliant expansion of the electrical installation by protection against electrical fires is thus always possible – easily and without the need for additional space.

www.siemens.com

SIEMENS

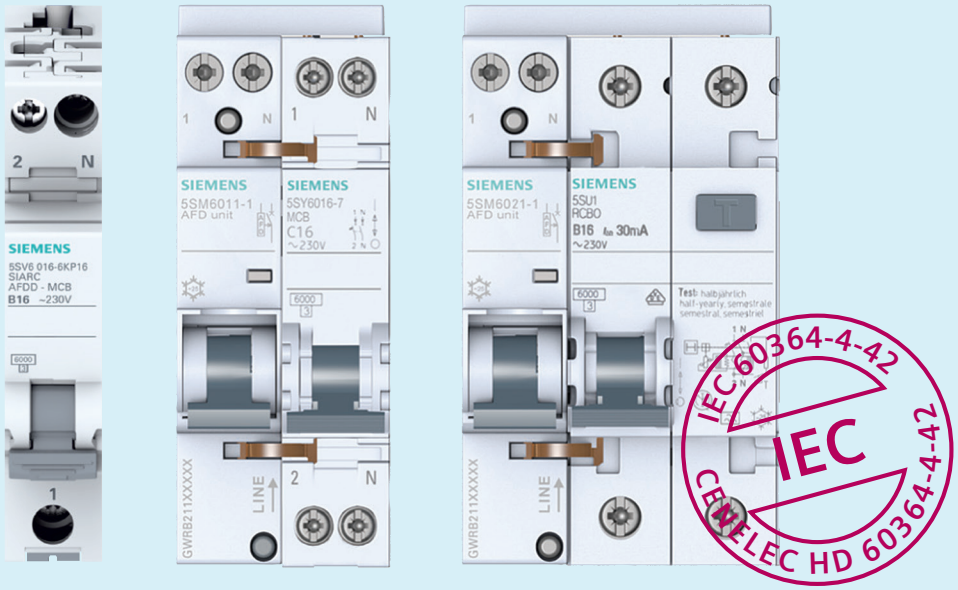

The smart solution.

Whether in an existing plant or a new installation – the 5SV6 AFDD and 5SM6 AFD unit can be deployed in any distribution board. It quickly identifies dangerous faults caused by parallel or serial arcing faults and switches off before a fire occurs. The AFDD detects operational arcing faults and only trips in the event of an actual fault.

5SV6 AFDDs with integrated MCB & RCBO in 18mm width

	Rating	With integrated MCB				With integrated RCBO	Unit LP* ₹	Std. Pkg.** (Nos.)
		B characteristic	Unit LP* ₹	C characteristic	Unit LP* ₹	30mA, Type A, C characteristic		
	6A	5SV60166KK06	58240.-	5SV60167KK06	58240.-	5SV63167KK06	67960.-	1
	10A	5SV60166KK10	58240.-	5SV60167KK10	58240.-	5SV63167KK10	67960.-	
	13A	5SV60166KK13	59785.-	5SV60167KK13	59785.-	5SV63167KK13	67960.-	
	16A	5SV60166KK16	58240.-	5SV60167KK16	58240.-	5SV63167KK16	67960.-	
	20A	5SV60166KK20	66000.-	5SV60167KK20	66000.-	5SV63167KK20	74925.-	
	25A	5SV60166KK25	66000.-	5SV60167KK25	66000.-	5SV63167KK25	74925.-	
	32A	5SV60166KK32	66000.-	5SV60167KK32	66000.-	5SV63167KK32	74925.-	
	40A	5SV60166KK40	67960.-	5SV60167KK40	67960.-	5SV63167KK40	74925.-	

5SM6 AFDD with integrated MCB

	Rating	Module width	Reference No.	Description	Unit LP* ₹	Std. Pkg.** (Nos.)
	16A	2	5SM60111XX02	AFDD 16A, 230V, 2MW (Integrated with 1MW, 1+N, 16A MCB)	90030.-	1

5SM6 AFD units (Suitable for add on with RCBO)

	Rating	Module width	Reference No.	Description	Unit LP* ₹	Std. Pkg.** (Nos.)
	16A	3	5SM60212	AFD Unit 1-16A, 230V, 1MW (Suitable for 2P 2M, 5SU1 RCBO)	50550.-	1
	40A	3	5SM60242	AFD Unit 1-40A, 230V, 1MW (Suitable for 2P 2M, 5SU1 RCBO)	71400.-	

* LP - List Price

** Purchase MOQ for our authorized dealers is in multiples of standard packing, contact Siemens Sales Office for further details

SIEMENS


SENTRON
Circuit protection devices
with measuring and communication function



SENTRON Powercenter 1100 data transceiver



SENTRON 5SV6 COM AFDD/MCB

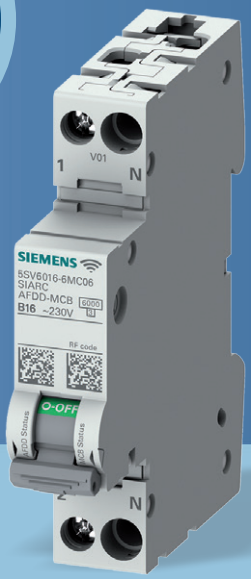

www.siemens.com

SENTRON AFDD COM
5SV6

	Rating	With integrated MCB				Std. Pkg.** (Nos.)
		B characteristic	Unit LP* ₹	C characteristic	Unit LP* ₹	
	6 A	5SV60166MC06	74035.-	5SV60167MC06	74035.-	1
	10 A	5SV60166MC10	74035.-	5SV60167MC10	74035.-	
	13 A	5SV60166MC13	75585.-	5SV60167MC13	75585.-	
	16 A	5SV60166MC16	74035.-	5SV60167MC16	74035.-	
	20 A	5SV60166MC20	76940.-	5SV60167MC20	76940.-	
	25 A	5SV60166MC25	76940.-	5SV60167MC25	76940.-	
	32 A	5SV60166MC32	76940.-	5SV60167MC32	76940.-	


SENTRON Powercenter 1100
7KN

	Reference No.	Description	Unit LP* ₹	Std. Pkg.** (Nos.)
	7KN11110MC00	Powercenter 1100 up to 24 SENTRON COM devices, 24 V DC	POR	1

* LP - List Price

** Purchase MOQ for our authorized dealers is in multiples of standard packing, contact Siemens Sales Office for further details

Applications:

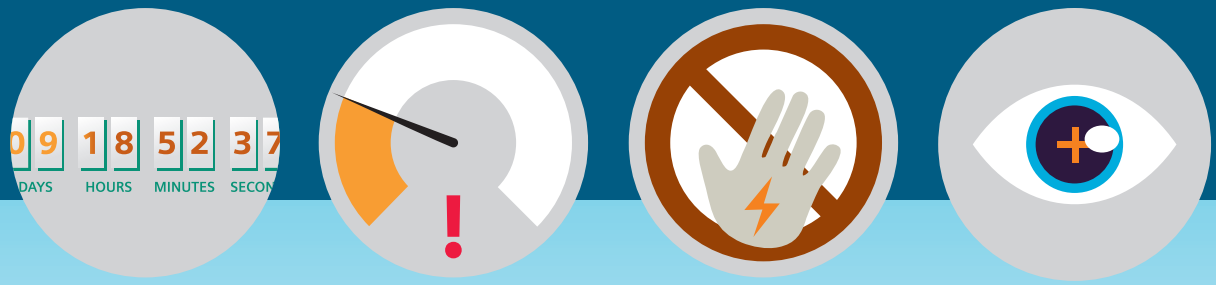

Operating hours counter

The values measured by the installation device provide information on the electrical consumer's (e.g., an LED) exact operating time allowing for optimized maintenance.

Fault monitoring

A decline of electrical current, voltage or temperature below normal values may hint at a failure of the electrical consumer. An increased electrical current may indicate a defect of connected equipment.

Load management

When a certain number of electrical consumers is active, additional devices cannot be switched on. This prevents current peaks.

Function monitoring

The measured values indicate the execution of an activity by the electrical consumer (e.g., automatic feeders in livestock farming).

5TR4 Automatic Changeover Current Limiter

Effortlessly manage power transitions with our 5TR4 ACCL, ensuring seamless operations and preventing electrical overload.

Heavy duty
Conforms to utilization category AC32A (IEC 60947-6-1)

High endurance cycle
Ensuring efficient and long life of your ACCL

Safe during short circuits
Iq short circuit of 5kA

Warning & Alerts
Overload indication via LED & Beep

Standard compliant
Product conforms to IEC 60947-6-1

Low power consumption
Coil operates only during backup supply



SIEMENS



Betagard 8GB Distribution Boards

Perfect blend of beauty and features with assured performance


- Complete range for Residential, Commercial and Industrial Infrastructures
- DBs offer latest design with highest aesthetic appeal
- DBs available with type testing as per the latest applicable standards
- User friendly design offers ease during maintenance and assists the installer for correct installation

www.siemens.co.in

SIEMENS

Betagard Distribution Boards
8GB32 # SPN and TPN DBs

- Type Tested as per IEC 61439 Standards at third party and internal test laboratories
- Available in IP 20 and IP 43 Versions
- Single Door, Metal Double Door and Acrylic Double Door options available
- Standard Wire Way Boxes available for all Single Door and Double Door DBs
- Additional safety with Insulated Shorting Links, Shrouded Neutral Links and Door Earthing
- TPN DBs can be easily made suitable for PPI configuration using TPN to PPI Conversion Kits
- Detachable DIN rail assembly and intermittent door facilitates ease in wiring during installation and maintenance
- DBs are subjected to seven tank process and treated with premium quality powder coating
- Cement masking sheet protects the DBs against extreme site conditions

	Item Description	Incoming Slots (MW)	Outgoing Slots (MW)	Total Slots (MW)	Reference No	Unit MRP* ₹	Std. Pkg.** (Nos.)
Metal Enclosures, IP20:							
	1 Module	–	–	1	8GB32100RC01	1505.-	1/20
	2 Module	–	–	2	8GB32100RC02	2245.-	1/20
	3 Module	–	–	3	8GB32100RC03	2245.-	1/20
	4 Module	–	–	4	8GB32100RC04	2245.-	1/20
	6 Module	–	–	6	8GB32100RC06	2960.-	1/20
	8 Module	–	–	8	8GB32100RC08	3485.-	1/10
SPN Single Door DBs#, IP20:							
	6 Module	2	4	6	8GB32101RC06	4430.-	1
	8 Module	2	6	8	8GB32101RC08	4710.-	1
	10 Module	2	8	10	8GB32101RC10	5665.-	1
	12 Module	2	10	12	8GB32101RC12	5870.-	1
	14 Module	2	12	14	8GB32101RC14	6630.-	1
	16 Module	2	14	16	8GB32101RC16	7140.-	1
SPN Metal Double Door DBs#, IP 43:							
	6 Module	2	4	6	8GB32102RC06	6920.-	1
	8 Module	2	6	8	8GB32102RC08	7185.-	1
	10 Module	2	8	10	8GB32102RC10	8355.-	1
	12 Module	2	10	12	8GB32102RC12	8580.-	1
	14 Module	2	12	14	8GB32102RC14	10005.-	1
	16 Module	2	14	16	8GB32102RC16	10250.-	1
SPN Acrylic Double Door DBs#, IP 43:							
	6 Module	2	4	6	8GB32103RC06	8125.-	1
	8 Module	2	6	8	8GB32103RC08	8580.-	1
	10 Module	2	8	10	8GB32103RC10	10005.-	1
	12 Module	2	10	12	8GB32103RC12	10735.-	1
	14 Module	2	12	14	8GB32103RC14	11200.-	1
	16 Module	2	14	16	8GB32103RC16	11680.-	1
Wire Way Box For SPN Single Door IP 20 DBs:							
	For 6 MOD SPN Single door DB	–	–	–	8GB32106RC06	2915.-	1/5
	For 8 MOD SPN Single door DB	–	–	–	8GB32106RC08	2915.-	1/5
	For 10 MOD SPN Single door DB	–	–	–	8GB32106RC10	3140.-	1/5
	For 12 MOD SPN Single door DB	–	–	–	8GB32106RC12	3140.-	1/5
	For 14 MOD SPN Single door DB	–	–	–	8GB32106RC14	3625.-	1/5
	For 16 MOD SPN Single door DB	–	–	–	8GB32106RC16	3625.-	1/5
Wire Way Box For SPN Double Door IP 43 DBs:							
	For 6 MOD SPN Double door DB	–	–	–	8GB32107RC06	3140.-	1/5
	For 8 MOD SPN Double door DB	–	–	–	8GB32107RC08	3140.-	1/5
	For 10 MOD SPN Double door DB	–	–	–	8GB32107RC10	3410.-	1/5
	For 12 MOD SPN Double door DB	–	–	–	8GB32107RC12	3410.-	1/5
	For 14 MOD SPN Double door DB	–	–	–	8GB32107RC14	4335.-	1/5
	For 16 MOD SPN Double door DB	–	–	–	8GB32107RC16	4335.-	1/5

Note: * MRP - Maximum Retail Price # Also available in flat door option
For Customized Solutions in Distribution Boards please contact our Sales Office
** Purchase MOQ for our authorized dealers is in multiples of standard packing, contact Siemens Sales Office for further details

Betagard Distribution Boards
8GB32 # SPN and TPN DBs


	Item Description	Incoming Slots (MW)	Outgoing Slots (MW)	Total Slots (MW)	Reference No	Unit MRP* ₹	Std. Pkg.** (Nos.)
TPN Single Door DBs#, IP20:							
	4 way	8	12	20	8GB32201RC04	11450.-	1
	6 way	8	18	26	8GB32201RC06	13000.-	1
	8 way	8	24	32	8GB32201RC08	15685.-	1
	10 way	8	30	38	8GB32201RC10	22765.-	1
	12 way	8	36	44	8GB32201RC12	23245.-	1
	14 way	8	42	50	8GB32201RC14	26660.-	1
	16 way	8	48	56	8GB32201RC16	27655.-	1
TPN Metal Double Door DBs#, IP 43							
	4 way	8	12	20	8GB32202RC04	13985.-	1
	6 way	8	18	26	8GB32202RC06	16900.-	1
	8 way	8	24	32	8GB32202RC08	20315.-	1
	10 way	8	30	38	8GB32202RC10	29345.-	1
	12 way	8	36	44	8GB32202RC12	30075.-	1
	14 way	8	42	50	8GB32202RC14	35700.-	1
	16 way	8	48	56	8GB32202RC16	36720.-	1
TPN Acrylic Double Door DBs#, IP 43							
	4 way	8	12	20	8GB32203RC04	16900.-	1
	6 way	8	18	26	8GB32203RC06	20810.-	1
	8 way	8	24	32	8GB32203RC08	24960.-	1
	10 way	8	30	38	8GB32203RC10	32550.-	1
	12 way	8	36	44	8GB32203RC12	37890.-	1
	14 way	8	42	50	8GB32203RC14	40585.-	1
	16 way	8	48	56	8GB32203RC16	43320.-	1
TPN to PPI Conversion Kit@							
	To convert 6 way TPN DB to 4 way TPN PPI DB				8GB32205RC04	8820.-	1/5
	To convert 8 way TPN DB to 6 way TPN PPI DB				8GB32205RC06	10290.-	1/5
	To convert 10 way TPN DB to 8 way TPN PPI DB				8GB32205RC08	10550.-	1/5
	To convert 12 way TPN DB to 10 way TPN PPI DB				8GB32205RC10	11260.-	1/5
	To convert 14 way TPN DB to 12 way TPN PPI DB				8GB32205RC12	12025.-	1/5
	To convert 16 way TPN DB to 14 way TPN PPI DB				8GB32205RC14	12715.-	1/5
Wire Way Box For TPN Single Door IP 20 DBs							
	For 4 Way TPN Single door DB	–	–	–	8GB32206RC04	3725.-	1/5
	For 6 Way TPN Single door DB	–	–	–	8GB32206RC06	3725.-	1/5
	For 8 Way TPN Single door DB	–	–	–	8GB32206RC08	6655.-	1/5
	For 10 Way TPN Single door DB	–	–	–	8GB32206RC10	8355.-	1/5
	For 12 Way TPN Single door DB	–	–	–	8GB32206RC12	8590.-	1/5
	For 14 Way TPN Single door DB	–	–	–	8GB32206RC14	8820.-	1/5
	For 16 Way TPN Single door DB	–	–	–	8GB32206RC16	9345.-	1/5
Wire Way Box For TPN Double Door IP 43 DBs							
	For 4 Way TPN Double door DB	–	–	–	8GB32207RC04	3950.-	1/5
	For 6 Way TPN Double door DB	–	–	–	8GB32207RC06	4465.-	1/5
	For 8 Way TPN Double door DB	–	–	–	8GB32207RC08	7115.-	1/5
	For 10 Way TPN Double door DB	–	–	–	8GB32207RC10	7625.-	1/5
	For 12 Way TPN Double door DB	–	–	–	8GB32207RC12	9345.-	1/5
	For 14 Way TPN Double door DB	–	–	–	8GB32207RC14	9810.-	1/5
	For 16 Way TPN Double door DB	–	–	–	8GB32207RC16	10095.-	1/5

Note: * MRP - Maximum Retail Price
@ Contains required accessories to Make the DB suitable for PPI Configuration
For Customized Solutions in Distribution Boards please contact our Sales Office
** Purchase MOQ for our authorized dealers is in multiples of standard packing, contact Siemens Sales Office for further details
# Also available in flat door option

Betagard Distribution Boards
8GB32 TPN Phase Segregated DBs

	Item Description	Incoming Slots (MW)	Sub - Incomer Slots (MW)	Outgoing Slots (MW)	Total Slots (MW)	Reference No	Unit MRP* ₹	Std. Pkg.** (Nos.)
TPN Phase segregated DBs, IP 20 For MCB as incomer								
	4 Way	12	12	12	36	8GB32001RC04	30650.-	1
	6 Way	12	12	18	42	8GB32001RC06	34475.-	1
	8 Way	12	12	24	48	8GB32001RC08	40240.-	1
	12 Way	12	12	36	60	8GB32001RC12	47910.-	1
TPN Phase segregated DBs, (8 segment) IP 43 For MCB as incomer								
	4 way	12	12	12	36	8GB32002RC04	36400.-	1
	6 way	12	12	18	42	8GB32002RC06	42150.-	1
	8 way	12	12	24	48	8GB32002RC08	47910.-	1
	12 way	12	12	36	60	8GB32002RC12	57475.-	1
TPN Phase segregated DBs, IP 43 for MCCB as incomer upto 160A								
	6 way		12	18	30	8GB32012RC06	65110.-	1
	8 way		12	24	36	8GB32012RC08	74705.-	1
	12 way		12	36	48	8GB32012RC12	84290.-	1
Wire Way box for MCB Incomer, IP 43 DBs								
	For 4 Way	–	–	–	–	8GB32007RC04	9565.-	1
	For 6 Way	–	–	–	–	8GB32007RC06	11480.-	1
	For 8 Way	–	–	–	–	8GB32007RC08	13385.-	1
	For 12 Way	–	–	–	–	8GB32007RC12	15305.-	1
Wire Way box for MCCB Incomer, IP 43 DBs								
	For 6 Way	–	–	–	–	8GB32017RC06	11480.-	1
	For 8 Way	–	–	–	–	8GB32017RC08	13385.-	1
	For 12 Way	–	–	–	–	8GB32017RC12	15305.-	1

Betagard Distribution Board 8GB

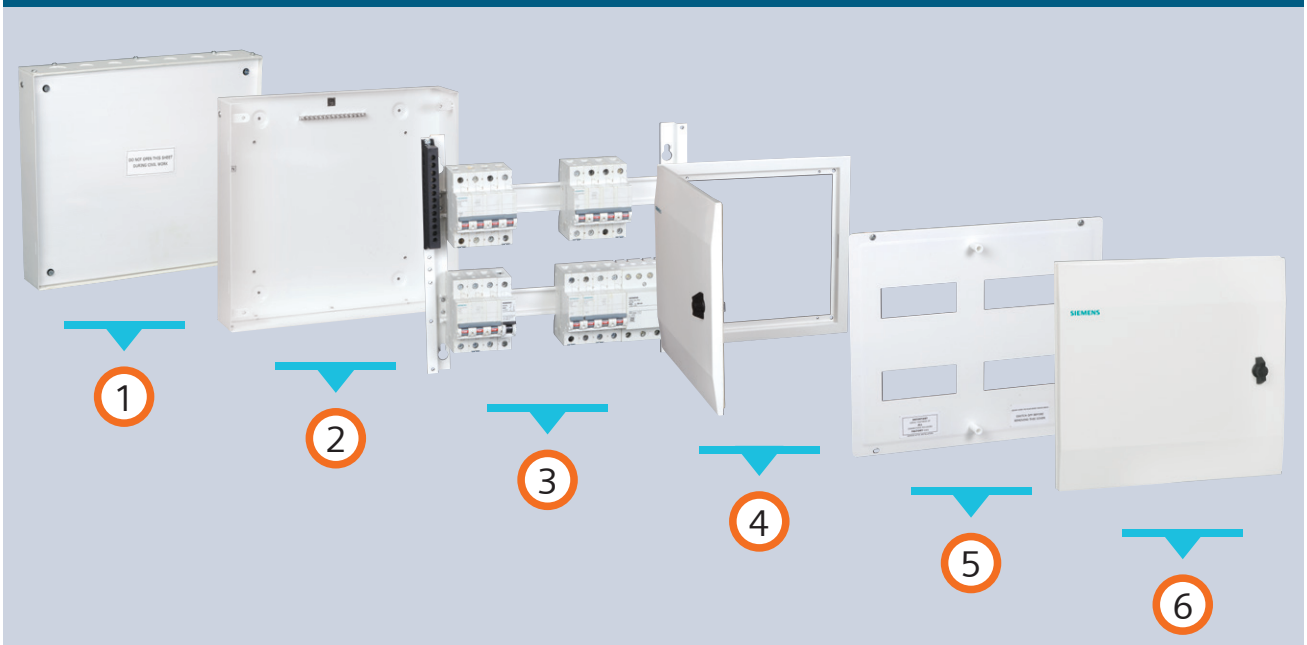


1 U-box with Cement masking sheet
2 U-box with Earth links
3 Detachable DIN-rail channel with Shrouded Neutral link
4 Door frame with Door
5 Detachable Intermittent Plate
6 Door with Quarter Turn Knob

Note: * MRP - Maximum Retail Price
** Purchase MOQ for our authorized dealers is in multiples of standard packing, contact Siemens Sales Office for further details

Industrial Plug & Sockets

	Item Description	Total Slots (MW)	Reference No	Unit MRP* ₹	Std. Pkg.** (Nos.)
Plug & Socket, IP20 with provision for MCB mounting					
	1 Phase 20A, 1P MCB	1	8GB0501RC	4980.-	1/20
	1 Phase 20A, 2P MCB	2	8GB0501SRC	4980.-	1/20
	3 Phase 32A, 3P MCB	3	8GB0502	10525.-	1/15
	3 Phase 32A, 3P+N MCB	4	8GB0502S	10525.-	1/15
	5 Pin (3P+N+PE) 3Phase 32A MCB 3P+N MCB	8	8GB050332	16630.-	1/5
	5 Pin (3P+N+PE) 3Phase 63A MCB 3P+N MCB	8	8GB050363	43330.-	1/5

Simbox WP

	Item Description	Total Slots (MW)	Reference No	Unit MRP* ₹	Std. Pkg.** (Nos.)
Simbox WP (IP65 DBs)					
	1 Row, 4Mod	4	8GB13710		1
	1 Row 8Mod	8	8GB13711		1
	1 Row 12Mod	12	8GB13712		1
	1 Row 18Mod	18	8GB13713	Price on request	1
	2 Row 2 x 12Mod	24	8GB13722		1
	2 Row, 2 x 18Mod	36	8GB13723		1
	3 Row, 3 x 18Mod	54	8GB13733		1
	4 Row 4 x 18Mod	72	8GB13743		1
Accessories for Simbox WP					
	Coupling covers,12M		8GB20510		1
	Coupling covers,18M		8GB20511		1
	Insulated N/PE terminals, 8MW		8GB20520	Price on request	1
	Insulated N/PE terminals, 12MW		8GB20521		1
	Insulated N/PE terminals, 18MW		8GB20522		1
	Cylindrical security lock		8GB20550		1

Note: * MRP - Maximum Retail Price
For Customized Solutions in Distribution Boards please contact our Sales Office
** Purchase MOQ for our authorized dealers is in multiples of standard packing, contact Siemens Sales Office for further details



Betagard Distribution Boards Accessories

	Item Description	Reference No	Unit MRP* ₹	Std. Pkg.** (Nos.)
Blanking Plate				
	1 MW	8GB9901	195.-	25
Insulated Shorting Links				
Single Phase Shorting Links for Shorting 1P MCBs				
	For SPN and TPN PPI DB			
	5 Leg SP Shorting Link	8GB9905LSP	585.-	10
	7 Leg SP Shorting Link	8GB9907LSP	680.-	10
	9 Leg SP Shorting Link	8GB9909LSP	800.-	10
	11 Leg SP Shorting Link	8GB9911LSP	845.-	10
	13 Leg SP Shorting Link	8GB9913LSP	1135.-	10
	15 Leg SP Shorting Link	8GB9915LSP	1365.-	10
	17 Leg SP Shorting Link	8GB9917LSP	1440.-	10
	For TPN DB			
	4 Leg SP Shorting Link	8GB9904LSP	585.-	10
	6 Leg SP Shorting Link	8GB9906LSP	680.-	10
	8 Leg SP Shorting Link	8GB9908LSP	800.-	10
	10 Leg SP Shorting Link	8GB9910LSP	845.-	10
	12 Leg SP Shorting Link	8GB9912LSP	1135.-	10
	14 Leg SP Shorting Link	8GB9914LSP	1365.-	10
	16 Leg SP Shorting Link	8GB9916LSP	1440.-	10
Two Phase, 1 meter long for shorting 2P MCBs (suitable for maximum of 28 nos. 2MW devices)				
	Shorting link without End caps, Can be cut and used.	8GB990SLLDP	14180.-	1
	End Caps for 2 pole Shorting Links	8GB990ECLDP	230.-	10
Three Phase, 1 meter long for shorting 3P MCBs (suitable for maximum of 19 nos. 3MW devices)				
	Shorting link without Enc caps, Can be cut and used.	8GB990SLLTP	15510.-	1
	End Caps for 3 pole Shorting Links	8GB990ECLTP	350.-	10
Three Phase + N, 1 meter long for shorting TPN MCBs (suitable for maximum of 14 nos. 4MW devices)				
	Shorting link without Enc caps, Can be cut and used.	8GB990SLLTPN	16395.-	1
	End Caps for 3 pole Shorting Links	8GB990ECLTPN	435.-	10
Neutral Terminals				
Neutral Terminals For 8GB0 and 8GB31 DBs (Along with Mounting Stands)				
	5 Way Neutral Link	8GB9905NL	625.-	10
	11 Way Neutral Link	8GB9911NL	925.-	10
	13 Way Neutral Link	8GB9913NL	1055.-	10
	15 Way Neutral Link	8GB9915NL	1185.-	10
Neutral Terminals For 8GB32 DBs (With Terminal Shroud and Cover)				
	Neutral Terminal 5 Holes	8GB9905NPE	680.-	10
	Neutral Terminal 11 Holes	8GB9911NPE	945.-	10
	Neutral Terminal 13 Holes	8GB9913NPE	1135.-	10
	Neutral Terminal 15 Holes	8GB9915NPE	1250.-	10
Earth Terminals				
	5 Way Earth Link	8GB9905EL	525.-	10
	11 Way Earth Link	8GB9911EL	885.-	10
	13 Way Earth Link	8GB9913EL	945.-	10
	15 Way Earth Link	8GB9915EL	1135.-	10

Note: * MRP - Maximum Retail Price
** Purchase MOQ for our authorized dealers is in multiples of standard packing, contact Siemens Sales Office for further details

DISCOVER THE POWER OF **SIMPLICITY**

SINOPLUS low-voltage electrical products

Cost-effective
Best price performance ratio

Comprehensive range
For various applications

Reliable
Siemens trusted quality

IEC **Safe**
Complies with IEC standards



www.siemens.co.in

SIEMENS



5SD Surge Protection Devices

Safe & Reliable

Surge Protection Devices are available in the following types:

Type 1 - For incoming power supply panels, in buildings with lightning protection system. Must be accompanied by downstream SPD

Type 2 - For distribution panels located downstream of Type 1 protectors or in incoming supply panels in areas of low exposure to lightning strikes, where the building is not fitted with lightning protection system

Type 3 - Always installed downstream of Type 2 protection designed to protect sensitive equipment or equipment located more than 20m downstream of Type 2 SPD

www.siemens.co.in

SIEMENS

Surge Protection Devices
For protection of equipment against lightning and switching surges

- Standard: IEC 61643-11 / EN 61643-11
- Type 1, Type 2 and Photovoltaic surge protection
- With Remote signaling contact
- Integrated SPD health indicator

Type 1: Lightning Surge Arresters

- Maximum continuous operating voltage Uc: 350V



Reference No.	Rated voltage	Pole	Module width	Total I_{imp} (10/350µs)	I_{max} (8/20µs)	Remote status	Unit LP* ₹
5SD74121RC	240V AC	1P+N	4	50kA	50kA	Yes	**38215.-**
5SD74141RC	240/415V AC	3P+N	8	100kA	50kA	Yes	**74390.-**

Type 2: Surge Arresters



Reference No.	Rated voltage	Pole	Module width	U_c	I_{max} (8/20µs)	Remote status	Unit LP* ₹
5SD74610RC	240V AC	1P	1	335V AC	20kA	No	**6250.-**
5SD74640RC	240/415V AC	3P+N	4	335V AC	40kA	No	**18580.-**

Surge Arresters for Photovoltaic application

On the DC side, overvoltage protection is required for the inverters which can be ensured by using 5SD74836RC.
On the AC side, overvoltage protection can be ensured using surge arresters Type 2 (5SD7461-0RC/5SD7464-0RC)



Reference No.	Rated voltage	Pole	Module width	U_{cpv}	I_{max} (8/20µs)	Remote status	Unit LP* ₹
5SD74836RC	1170V DC	L+ and L-	3	1170V DC	40kA	No	**10555.-**

Note: Standard packing: 1unit
*LP: List Price



Type 1: Lightning Surge Arresters

For TN-S/ TT system

Lightning arresters, Type 1 requirement class B, U_C 350V Pluggable protective modules 4-pole, 3+1 circuit for TN-S and TT systems with remote display



5SD74121



5SD74141

Rated voltage U_N	Backup fuse rating	Protection level	Lightening impulse current I_{mp}(10/350µs)		Pole	Reference No.	Unit LP* ₹
			L-N or L-(PE), 1P/3P	N-PE			
240V AC	125A gL/gG	1.5-2.5kV	25kA	100kA	1P+N	5SD74121	POR
240/415V AC	125A gL/gG	1.5-2.5kV	25kA/75kA	100kA	3P+N	5SD74141	

For TN-C system

Lightning arresters, Type 1 requirement class B, U_C 350V Pluggable protective modules 3-pole, 3+0 circuit for TNC systems with remote display



5SD74131

Rated voltage U_N	Backup fuse rating	Protection level	Lightening impulse current I_{mp}(10/350µs)		Pole	Reference No.	Unit LP* ₹
			L-N or L-(PE), 1P/3P	N-PE			
240/415V AC	125A gL/gG	≤1.5kV	25kA/75kA	-	3P	5SD74131	POR

Type 2 : Surge Arresters

For TN-S/ TT system

Surge arresters Type 2 requirement class C, U_C:350V/260V (L-N/N-PE) Pluggable protective modules 4-pole, 3+1 circuit for TN-S and TT AC systems

Rated Discharge Surge Current In=20kA SC capacity with backup fuse=25kA



5SD74641



5SD7422-0

Rated voltage U_N	Backup fuse rating	Protection level U_p	Rated discharge current I_n (8/20usec)		Pole	Remote signaling	Reference No.	Unit LP* ₹
			L-N or L-(PE), 1P/3P	N-PE				
240/415V	80A gL/gG	1.5-1.9kV	40kA	40kA	3P+N	No	5SD74640	POR
240/415V	80A gL/gG	1.5-1.9kV	40kA	40kA	3P+N	Yes	5SD74641	
240V	80A gL/gG	1.5-1.9kV	20kA	20kA	1P+N	No	5SD74220	
240V	80A gL/gG	1.5-1.9kV	20kA	20kA	1P+N	Yes	5SD74221	

For TN-C system

Surge arresters Type 2 requirement class C, U_C:350V
Pluggable protective modules 3-pole, 3+0 circuit for TNC systems



5SD7463-0

Rated voltage U_N	Backup fuse rating	Protection level U_p	Maximum discharge surge current I_{max} L-N or L-(PE)N, 1P	Pole	Remote signaling	Reference No.	Unit LP* ₹
240/415V	80A gL/gG	≤1.5kV	40kA	3P	No	5SD74630	POR
240/415V	80A gL/gG	≤1.5kV	40kA	3P	Yes	5SD74631	

L - Line, N - Neutral, PE - Protective Earth

Note: Standard packing: 1unit * LP : List Price

Surge Protection Devices
For protection of equipment against lightning and switching surges

Type 3 : Surge Arresters

	Rated voltage	Rated current	Protection level	Rated discharge current	Pole	Reference No.	Unit LP* ₹
	24V AC 34V DC	26A	0.65kV	1kA	2P	**5SD74325**	**POR**
	120V AC 150V DC	26A	0.95kV	3kA	2P	**5SD74326**	
	240V AC 240V DC	26A	1.5kV	3kA	2P	**5SD74327**	

Surge Arresters for photovoltaic application

Due to the combination of three power varistors, the overvoltage protection required for the inverters is implemented on the DC side. On the AC side, the overvoltage protection can be ensured using surge arresters type 2 (5SD7422-/5SD7424-)

	Rated voltage U_N	Rated discharge current	Protection level U_p	Lightning Impulse current (L-N/L-(PE)N)	Max. discharge current	Pole	Remote signaling	Reference No.	Unit LP* ₹
 5SD74836	1000V DC	15kA	≤3.5kV	≤5kA	40kA	3P	No	**5SD74836**	**POR**

Replacement Plug

	SPD Type	Type	Connection	Reference No.	Unit LP* ₹
	5SD74121 5SD74131 5SD74141	Type 1	L-N	**5SD74181**	**POR**
	5SD74121 5SD74131 5SD74141		N-PE	**5SD74180**	
	5SD7463-0/1 5SD7464-0/1	Type 2	L-N	**5SD74681**	
	5SD7464-0/1		N-PE	**5SD74880**	
	5SD7422-0/1		L-N	**5SD74281**	
	5SD7422-0/1		N-PE	**5SD74280**	
	5SD7483-6	PV	-	**5SD74983**	

* Also available Type 1+ Type 2 and Type1/2 Compact SPDs for protection against overvoltages from Lightning strikes as well as by switching operations in network

Note:
Standard packing: 1unit
* LP - List Price



SENTRON
Modular Devices

For efficient control and monitoring

- 7LF time switch - Digital and Analog timers for all applications; available in Mini, Top, Profi, Astro, Expert and Expert GPS variants
- 5TT5 insta contactors – For all control applications; also with Manual/Automatic switching indicator
- DIN mounted phase indicators, monitoring relays and measuring devices for final distribution circuits
- Twilight Switch for Automatic Street Light Control

www.siemens.co.in

SIEMENS

	Item Description	Rated Current I_n (A)	MW#	Reference No	Unit LP* ₹	Std. Pkg.** (Nos.)
Insta Contactors Standards: EN 60947-4-1, EN 60947-5-1						
	3NO+1NC contacts, 230V AC/220V DC (1NC contact rated for 30A)	40	3	5TT58410	20965.-	1/5
	3NO+1NC contacts, 24V AC/24V DC (1NC contact rated for 30A)	40	3	5TT58412	21070.-	1/5
	4NO contacts, 230V AC/220V DC	40	3	5TT58400	21130.-	1/5
	4NO contacts, 24V AC/24V DC	40	3	5TT58402	21100.-	1/5
	3NO+1NC contacts, 230V AC/220V DC (1NC contact rated for 30A)	63	3	5TT58510	32835.-	1/5
	3NO+1NC contacts, 24V AC/24V DC, (1NC contact rated for 30A)	63	3	5TT58512	33435.-	1/5
	4NO contacts, 230V AC/220V DC	63	3	5TT58500	26780.-	1/5
	4NO contacts, 24V AC/24V DC	63	3	5TT58502	26835.-	1/5
Insta Contactors Manual / Automatic with Switching Indicator Standards: IEC60947-4-1, IEC60947-5-1						
	4NO contacts, 400V AC	40	3	5TT58406	31040.-	1/5
	4NO contacts, 400V AC	63	3	5TT58506	40675.-	1/5
Accessories						
	Control Switch with 1 Make and 1 Break Contact For AC 230V/400V For 5TT58 and 5TT50			5TT59101	9350.-	1/10
Twilight switch						
	Twilight Switch with light sensor 230 V, 50/60 Hz, 1MW, 16A			7LQ2300	87955.-	1

Note:
* LP - List Price # 1MW (Module Width) = 18mm
** Purchase MOQ for our authorized dealers is in multiples of standard packing, contact Siemens Sales Office for further details



	Item Description	Rated Current I_n (A)	MW#	Reference No	Unit LP* ₹	Std. Pkg.** (Nos.)
Voltage Relays Standards: IEC 60255, DIN VDE 0435-303						
	Voltage relay for undervoltage monitoring of 1,2,3 phases against N with phase failure detection, Switching thresholds 07-0.9xV, not adjustable; 2 C/O contacts, 4A, 230/400V AC	4	2	5TT3402	33975.-	1
	Voltage relay for undervoltage monitoring of 1,2,3 phases against N, short time failure detection with phase failure detection and N conductor monitoring, Switching thresholds 0.8-0.85xV, not adjustable; 2 C/O contacts, 230/400V AC	4	2	5TT3407	62150.-	1
	Voltage relay for over and undervoltage monitoring of 3 phases against N with asymmetry, reverse voltage and phase failure detection with N conductor monitoring and adj. Time delay of 0.1 to 20s, Switching thresholds: U/voltage 0.7-1.1xV, 4% hysteresis, adjustable, O/voltage 0.9-1.1xV, 4% hysteresis, adjustable; 2 C/O contacts, 230/400V AC	4	2	5TT3408	63980.-	1
RYG 3 phase indicator in 1MW						
	3 phase indicator (all with green color cap)		1	5TE5802	8545.-	1/10
	3 phase indicator (red/yellow/green)		1	5TE5803	8130.-	1/10
	Transparent cap (1 set = 3 items, R, Y, G lens)			5TG8070	2185.-	1/10
Power ON Indicator (Economy Version) 230 V AC, 1 Phase						
	Light indicators for max. cable length up to 5 m with 1 red lamp		1	5TE5800	5100.-	1/12
	Light indicators for max. cable length up to 250 m with 1 red lamp		1	5TE5804	6480.-	1/12
	Transparent cap (Red) (1 set 5x each red/transparent)			5TG8061	2820.-	5
	Transparent cap (Green) (1 Set with 5x each green/transparent)			5TG8062	2820.-	5
	Transparent cap (Yellow) (1 Set with 5x each yellow/transparent)			5TG8063	2820.-	5
	Transparent cap (Blue) (1 Set with 5x each blue/transparent)			5TG8064	2820.-	5
Fuse Monitor						
	Fuse monitors with transparent caps for all low voltage fuse systems, 230V AC	4	2	5TT3170	26650.-	1

Note:
* LP - List Price # 1MW (Module Width) = 18mm
** Purchase MOQ for our authorized dealers is in multiples of standard packing, contact Siemens Sales Office for further details

	Item Description	Rated Current I_n (A)	MW#	Reference No	Unit LP* ₹	Std. Pkg.** (Nos.)
Time Switches (Digital)						
	Mini digital, daily/weekly program, 100 hours reserve, 230V AC	16	1	**7LF45015**	**19835.-**	**1**
	Yearly time switch top digital 230V, 1 channel	16	2	**7LF45110**	**24290.-**	**1**
	Yearly time switch top digital 230V, 2 channel	16	2	**7LF45120**	**46505.-**	**1**
	Weekly time switch profi digital 230V, 1 channel	16	2	**7LF45210**	**43320.-**	**1**
	Weekly time switch profi digital 230V, 2 channel	16	2	**7LF45220**	**56030.-**	**1**
	Weekly time switch astro digital 230V, 1 channel	16	2	**7LF45310**	**43675.-**	**1**
	Weekly time switch astro digital 230V, 2 channel	16	2	**7LF45320**	**73005.-**	**1**
Time Switches (Mechanical) Standards: EN 60730-1						
	Quartz time switch Day 1 NO 230V/50-60Hz 1 MW with power reserve	16	1	**7LF53011**	**26875.-**	**1**
	Synchronous time switches without power reserve, for DIN rail mounting, day disk, 1CO, 230V AC	16	3	**7LF53005**	**14835.-**	**1**
	Quartz-clock time switches with power reserve for DIN rail mounting, day disk, 1CO, 230V AC	16	3	**7LF53016**	**28545.-**	**1**
	Quartz-clock time switches with power reserve for wall mounting, day disk, 1CO, 250V AC	16	—	**7LF53050**	**31230.-**	**1**
7LF53005	Synchronous time switches without power reserve, for wall mounting, day disk, 1CO, 250V AC	16	—	**7LF53010**	**17600.-**	**1**
Accessories for Digital Time Switches						
	USB adapter and software			**7LF49410**	**71885.-**	**1**
	Data key profi, astro			**7LF49411**	**7320.-**	**1**

Note:
* LP - List Price
# 1MW (Module Width) = 18mm
** Purchase MOQ for our authorized dealers is in multiples of standard packing, contact Siemens Sales Office for further details



3NA6 Fuse with Insulated Gripping Lugs

NEW


Enhancement in safety with high grade plastic cover plates.

IEC **Safe** Complies with IEC standards	**Ease of Maintenance** Retrofitting at site	**Reliable** Siemens trusted quality	RoHS COMPLIANT **RoHS** Complies to RoHS directives



www.siemens.co.in

SIEMENS

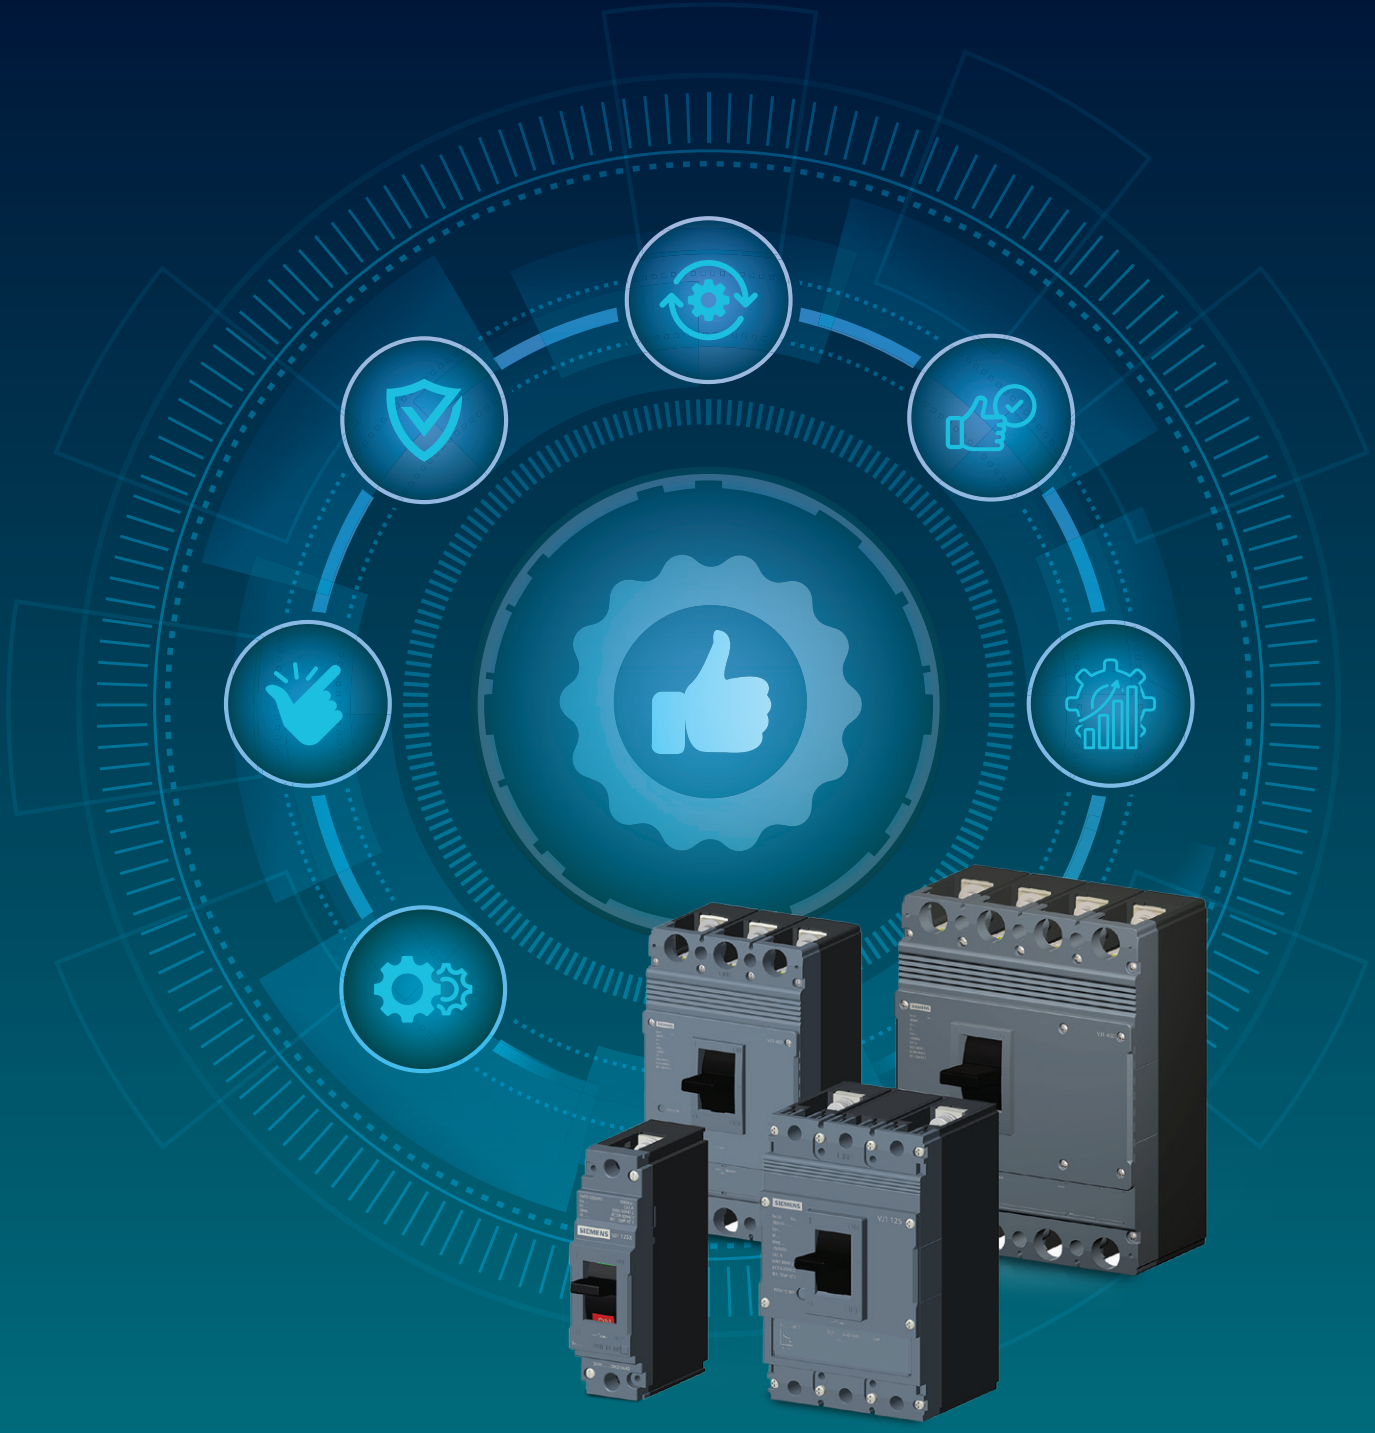

SINOPLUS

3VJ Moulded Case Circuit Breakers

- Rated current: 16A to 630A
- 1 pole, 2 pole, 3 pole & 4 pole versions
- Breaking capacity: 10kA to 55kA
- Thermal magnetic trip unit (FTFM, ATFM)
- Range of internal and external accessories

www.siemens.co.in

SIEMENS

3VJ Moulded Case Circuit Breakers$

3VJ MCCB, Thermal Magnetic Trip Unit, Fixed Thermal Fixed Magnetic (FTFM), 415V AC, 50Hz

Frame Size	Breaking Capacity @415V AC, 50/60Hz	Rated Current In (A)	3 Pole Type	4 Pole Type
3VJ10 (VJ1 125X)	18kA	16	3VJ1096-1DA32-0AA0	3VJ1096-1EA42-0AA0
		20	3VJ1002-1DA32-0AA0	3VJ1002-1EA42-0AA0
		25	3VJ1092-1DA32-0AA0	3VJ1092-1EA42-0AA0
		32	3VJ1003-1DA32-0AA0	3VJ1003-1EA42-0AA0
		40	3VJ1004-1DA32-0AA0	3VJ1004-1EA42-0AA0
		50	3VJ1005-1DA32-0AA0	3VJ1005-1EA42-0AA0
		63	3VJ1006-1DA32-0AA0	3VJ1006-1EA42-0AA0
		80	3VJ1008-1DA32-0AA0	3VJ1008-1EA42-0AA0
		100	3VJ1010-1DA32-0AA0	3VJ1010-1EA42-0AA0
		125	3VJ1012-1DA32-0AA0	3VJ1012-1EA42-0AA0
	25kA	16	3VJ1096-3DA32-0AA0	3VJ1096-3EA42-0AA0
		20	3VJ1002-3DA32-0AA0	3VJ1002-3EA42-0AA0
		25	3VJ1092-3DA32-0AA0	3VJ1092-3EA42-0AA0
		32	3VJ1003-3DA32-0AA0	3VJ1003-3EA42-0AA0
		40	3VJ1004-3DA32-0AA0	3VJ1004-3EA42-0AA0
		50	3VJ1005-3DA32-0AA0	3VJ1005-3EA42-0AA0
		63	3VJ1006-3DA32-0AA0	3VJ1006-3EA42-0AA0
		80	3VJ1008-3DA32-0AA0	3VJ1008-3EA42-0AA0
		100	3VJ1010-3DA32-0AA0	3VJ1010-3EA42-0AA0
		125	3VJ1012-3DA32-0AA0	3VJ1012-3EA42-0AA0
3VJ12 (VJ1 250)		160	3VJ1216-3DA32-0AA0	3VJ1216-3EA42-0AA0
		200	3VJ1220-3DA32-0AA0	3VJ1220-3EA42-0AA0
		250	3VJ1225-3DA32-0AA0	3VJ1225-3EA42-0AA0

3VJ MCCB, Thermal Magnetic Trip Unit, Adjustable Thermal Fixed Magnetic (ATFM), 415V AC, 50Hz

Frame Size	Breaking Capacity @415V AC, 50/60Hz	Rated Current In (A)	3 Pole Type	4 Pole Type
3VJ10 (VJ1 125X)	25kA	16	3VJ1096-3DB32-0AA0	3VJ1096-3EB42-0AA0
		20	3VJ1002-3DB32-0AA0	3VJ1002-3EB42-0AA0
		25	3VJ1092-3DB32-0AA0	3VJ1092-3EB42-0AA0
		32	3VJ1003-3DB32-0AA0	3VJ1003-3EB42-0AA0
		40	3VJ1004-3DB32-0AA0	3VJ1004-3EB42-0AA0
		50	3VJ1005-3DB32-0AA0	3VJ1005-3EB42-0AA0
		63	3VJ1006-3DB32-0AA0	3VJ1006-3EB42-0AA0
		80	3VJ1008-3DB32-0AA0	3VJ1008-3EB42-0AA0
		100	3VJ1010-3DB32-0AA0	3VJ1010-3EB42-0AA0
		125	3VJ1012-3DB32-0AA0	3VJ1012-3EB42-0AA0
3VJ12 (VJ1 250)		160	3VJ1216-3DB32-0AA0	3VJ1216-3EB42-0AA0
		200	3VJ1220-3DB32-0AA0	3VJ1220-3EB42-0AA0
		250	3VJ1225-3DB32-0AA0	3VJ1225-3EB42-0AA0
3VJ13 (VJ1 400)		320	3VJ1332-3DB32-0AA0	3VJ1332-3EB42-0AA0
		400	3VJ1340-3DB32-0AA0	3VJ1340-3EB42-0AA0
3VJ11 (VJ1 125)	36kA	16	3VJ1196-5DB32-0AA0	3VJ1196-5EB42-0AA0
		20	3VJ1102-5DB32-0AA0	3VJ1102-5EB42-0AA0
		25	3VJ1192-5DB32-0AA0	3VJ1192-5EB42-0AA0
		32	3VJ1103-5DB32-0AA0	3VJ1103-5EB42-0AA0
		40	3VJ1104-5DB32-0AA0	3VJ1104-5EB42-0AA0
		50	3VJ1105-5DB32-0AA0	3VJ1105-5EB42-0AA0
		63	3VJ1106-5DB32-0AA0	3VJ1106-5EB42-0AA0
		80	3VJ1108-5DB32-0AA0	3VJ1108-5EB42-0AA0
		100	3VJ1110-5DB32-0AA0	3VJ1110-5EB42-0AA0
		125	3VJ1112-5DB32-0AA0	3VJ1112-5EB42-0AA0
3VJ12 (VJ1 250)		160	3VJ1216-5DB32-0AA0	3VJ1216-5EB42-0AA0
		200	3VJ1220-5DB32-0AA0	3VJ1220-5EB42-0AA0
		250	3VJ1225-5DB32-0AA0	3VJ1225-5EB42-0AA0
3VJ13 (VJ1 400)		320	3VJ1332-5DB32-0AA0	3VJ1332-5EB42-0AA0
		400	3VJ1340-5DB32-0AA0	3VJ1340-5EB42-0AA0
3VJ14 (VJ1 630)		630	3VJ1463-5DB32-0AA0	3VJ1463-5EB42-0AA0

$ Kindly refer latest Power Distribution Products Price List for prices

3VJ Internal accessories$

Frame Size / Accessory	Accessory compartment/ Coil voltage	3VJ10 (VJ1 125X)	3VJ11 (VJ1 125)	3VJ12 (VJ1 250)	3VJ13/14 (VJ1 400/630)
Auxiliary Switches (AUX)	Left	3VJ9018-0AN11	3VJ9218-0AN11	3VJ9218-0AN11	3VJ9417-0AN11
	Right	–	3VJ9218-0AN21	3VJ9218-0AN21	3VJ9417-0AN21
Auxiliary + Alarm Switches (AUX+AL)	Left	3VJ9018-0AD11	3VJ9118-0AD11	3VJ9218-0AD11	3VJ9417-0AD11
	Right	–	3VJ9118-0AD21	3VJ9218-0AD21	3VJ9417-0AD21

3VJ External accessories$

Frame Size / Accessory		3VJ10 (VJ1 125X)	3VJ11 (VJ1 125)	3VJ12 (VJ1 250)	3VJ13/14 (VJ1 400/630)
Extended Door Mounted Rotary Operator (including 8UC handle)		3VJ9018-0HD11	3VJ9118-0HD11	3VJ9218-0HD11	3VJ9417-0HD11
	Enclosure	3VJ9016-0DE11 (2P, 3P)	3VJ9116-0DE11 (2P, 3P)	3VJ9216-0DE12 (2P, 3P)	–
		3VJ9014-0DE11 (4P)	3VJ9114-0DE11 (4P)	3VJ9214-0DE12 (4P)	–

Raja+ DOL Starters@
3TW Direct On Line Starters

IS/IEC 60947-4-1

CM/L No.7800027718

3ph, 50Hz DOL Starter in sheet steel housing, including bimetal relay with single phasing protection

	Motor Rating At 415V 3ph 50Hz		Starter Type	Contactors	Thermal Overload Relay	Relay range (A)	Max. Full Load Current (Amp)		Std. Pkg. (Nos.)
	HP	kW					3Ph, 415V 4P Squirrel Cage IS 8789:1996 Table 4	3Ph, 415V 2P MRP Submersible motor IS 9283:1995 Table 2	
	0.33	0.25	3TW7291-1A^64	3TS3010-0A##-08KA0	3UW5102-0J	0.63-1	-	-	1
	0.75	0.55	3TW7291-1A^66	3TS3010-0A##-08KA0	3UW5102-1A	1-1.6	1.7	-	1
	1	0.75	3TW7291-1A^68	3TS3010-0A##-08KA0	3UW5102-1C	1.6-2.5	2.2	-	1
	1.5	1.1	3TW7291-1A^69	3TS3010-0A##-08KA0	3UW5102-1D	2-3.2	2.9	**3.25**	1
	2	1.5	3TW7291-1A^71	3TS3010-0A##-08KA0	3UW5102-1F	3.2-5	3.8	**4.5**	1
	3	2.2	3TW7291-1A^72	3TS3010-0A##-08KA0	3UW5102-1G	4-6.3	5.1	**6.5**	1
	5	3.7	3TW7291-1A^74	3TS3010-0A##-08KA0	3UW5102-1J	6.3-10	8.1	**10**	1
	7.5	5.5	3TW7291-1A^75	3TS3210-0A##-08KA0	3UW5102-1K	8-12.5	11.4	**14.5**	1
	7.5	5.5	3TW7291-1A^77	3TS3210-0A##-08KA0	3UW5102-2A	10-16	-	-	1
	10	7.5	3TW7291-1A^78	3TS3210-0A##-08KA0	3UW5102-2B	12.5-20	15.4	**19.5**	1

^ Enter code for coil voltage, 50Hz (B for 200-400V AC, W for 332 - 456V AC)

Enter Code for operating coil voltage, 50 Hz (Z6 for 200-400V, R0 for 415V)

* MRP - Maximum Retail Price LP - List Price

$ Kindly refer latest Power Distribution Products Price List for prices

@ Kindly refer latest Control Products Price List for prices

Switch Disconnector Fuse@
Superswitch 3KL8 in open execution 3PN

Switch Disconnector Fuse: 3KL8 for power distribution (in Open Execution 3PN)^



Rated current Ie @ 690V AC 50Hz	SDF suitable for DIN type HRC Fuses	SDF suitable for BS type HRC Fuses	SDF suitable for cylindrical type HRC Fuses	Std. pkg. (nos.)
20A	3KL8111-5TA00	3KL8111-5TJ00	3KL8111-5TC00	1
32A	3KL8121-5TA00	3KL8121-5TJ00	3KL8121-5TC00	1
63A	3KL8151-5TA00	3KL8151-5TJ00	3KL8151-5TC00	1
100A	3KL8171-5TA00	–	–	1
100A	3KL8211-5TA00	3KL8211-5TJ00	–	1
125A	3KL8221-5TA00	3KL8221-5TJ00	–	1
160A	3KL8231-5TA00	3KL8231-5TJ00	–	1
200A	3KL8311-5UA00	3KL8311-5UJ00	–	1
250A	3KL8321-5UA00	3KL8321-5UJ00	–	1
315A	3KL8331-5UA00	3KL8331-5UJ00	–	1
400A	3KL8341-5UA00	3KL8341-5UJ00	–	1
500A	3KL8411-5UA00	3KL8411-5UJ00	–	1
630A	3KL8421-5UA00	3KL8421-5UJ00	–	1
800A	3KL8431-5UA00	3KL8431-5UJ00	–	1

^ 3PN is 3 Pole with neutral link

Selection table for SS Housing for 3KL8



Rated current Ie (A)	Reference No	Unit MRP* ₹	Std. Pkg. (Nos.)
3KL81 (20A - 63A)	3KX8235-4AC	–	1
3KL82 (100A - 160A)	3KX8235-4AC	–	1
3KL83 (200A - 400A)	3KX8345-4AC	–	1
3KL84 (500A - 800A)	3KX8435-4AC	–	1

Rated current Ie (A)	Gland box Reference No.	Unit MRP* ₹	Gland Plate Reference No.	Unit MRP* ₹	Std Pkg. (Nos.)
3KL81(20A-63A)	3KX8235-4DC	-	3KX8235-4GC	-	1
3KL82(100A-160A)	3KX8235-4DC	-	3KX8235-4GC	-	1
3KL83(200A-400A)	3KX8345-4DC	-	3KX8345-4GC	-	1
3KL84(500A-800A)	3KX8435-4DC	-	3KX8435-4GC	-	1

LV HRC Fuses@

DIN Type Fuse
Rated voltage: 500 V AC







Size	Rated current A	Reference No	Unit MRP* ₹	Std. Pkg. (Nos.)
000	2	3NA7 802-0RC	–	1/6
	4	3NA7 804-0RC	–	
	6	3NA7 801-0RC	–	
	10	3NA7 803-0RC	–	
	16	3NA7 805-0RC	–	
	20	3NA7 807-0RC	–	
	25	3NA7 810-0RC	–	
	32	3NA7 812-0RC	–	
	40	3NA7 817-0RC	–	
	50	3NA7 820-0RC	–	
	63	3NA7 822-0RC	–	
	80	3NA7 824-0RC	–	
	100	3NA7 830-0RC	–	
00	125	3NA7 832-0RC	–	
	160	3NA7 836-0RC	–	
1	50	3NA7 120-0RC	–	1/3
	63	3NA7 122-0RC	–	
	80	3NA7 124-0RC	–	
	100	3NA7 130-0RC	–	
	125	3NA7 132-0RC	–	
	160	3NA7 136-0RC	–	
	200	3NA7 140-0RC	–	
	224	3NA7 142-0RC	–	
	250	3NA7 144-0RC	–	

400 & 800A fuses - Rated voltage at 415 V AC





Size	Rated current A	Reference No	Unit MRP* ₹	Std. Pkg. (Nos.)
2	200	3NA7 240-0RC	–	1/3
	250	3NA7 244-0RC	–	
	315	3NA7 252-0RC	–	
	400#	3NA7 260-0RC	–	
3	315	3NA3 352-0RC	–	1/3
	400	3NA3 360-0RC	–	
	500	3NA3 365-0RC	–	
	630	3NA3 372-0RC	–	
	800#	3NA3 375-4RC	–	

BS Fuses



Type	Rated current A	Reference No	Unit MRP* ₹	Std. Pkg. (Nos.)
Offset Tag	2	3NW TIA2	–	20
	4	3NW TIA4	–	
	6	3NW TIA6	–	
	10	3NW TIA10	–	
	16	3NW TIA16	–	
	20	3NW TIA20	–	
	25	3NW TIA25	–	
	32	3NW TIA32	–	
	40	3NW TIS40	–	
	50	3NW TIS50	–	
	63	3NW TIS63	–	

Note: * MRP - Maximum Retail Price
@ Kindly refer latest Power Distribution Products Price List for prices

Available till stocks last

Betagard Distribution Boards 8GB31

	Item Description	Incoming Slots (MW)	Outgoing Slots (MW)	Total Slots (MW)	Reference No	Unit MRP* ₹	Std. Pkg.** (Nos.)
Betaflex (Flexi DBs), IP42							
	2Row x 12Mod	—	—	24	**8GB31424RC**	**Price on request**	**1**
	2Row x 16Mod	—	—	32	**8GB31426RC**		**1**
	4Row x 6Mod	—	—	24	**8GB31441RC**		**1**
	4Row x 8Mod	—	—	32	**8GB31442RC**		**1**
	4Row x 10Mod	—	—	40	**8GB31443RC**		**1**
	4Row x 12Mod	—	—	48	**8GB31444RC**		**1**
	4Row x 16Mod	—	—	64	**8GB31446RC**		**1**
Betabus (Vertical Busbar DBs with MCB as an incomer), IP42 (Suitable for 5SL/5SP MCBs, upto 125A as an incomer)							
	4 way	12	12	24	**8GB31471RC**	**Price on request**	**1**
	6 way	12	18	30	**8GB31473RC**		**1**
	8 way	12	24	36	**8GB31474RC**		**1**
	12 way	12	36	48	**8GB31477RC**		**1**
Betabusplus (Vertical Busbar DBs with MCCB as an incomer), IP42 (Suitable for 3VT1/3VA1 MCCBs, upto 160A as an incomer)							
	4 way	12	12	24	**8GB31571RC**	**Price on request**	**1**
	6 way	12	18	30	**8GB31572RC**		**1**
	8 way	12	24	36	**8GB31573RC**		**1**
	12 way	12	36	48	**8GB31574RC**		**1**
BetaMulti (DBs for power & communication), IP42							
	12 way SPN, provision	2	12	14	**8GB31215RC**	**Price on request**	**1**
	4 Way TPN, Provision	8	12	20	**8GB31220RC**		**1**
	6 way TPN, provision	8	18	26	**8GB31221RC**		**1**
	8 Way TPN Provision	8	24	32	**8GB31222RC**		**1**

Note:
* MRP - Maximum Retail Price
** Purchase MOQ for our authorized dealers is in multiples of standard packing, contact Siemens Sales Office for further details

Available till stocks last

Betagard Distribution Boards 8GB31

	Item Description	Incoming Slots (MW)	Outgoing Slots (MW)	Total Slots (MW)	Reference No	Unit MRP* ₹	Std. Pkg.** (Nos.)
Beta CO (DBs with built-in pre-wired phase changeover switches), IP42							
	40 A, 4 Way TPN, built-in	8	12	20	8GB31850RC	Price on request	1
	40 A, 6 Way TPN, built-in	8	18	26	8GB31851RC		1
	40 A, 8 Way TPN, built-in	8	24	32	8GB31852RC		1
	40 A, 12 Way TPN, built-in	8	36	44	8GB31854RC		1
	63 A, 4 Way TPN, built-in	8	12	20	8GB31860RC		1
	63 A, 6 Way TPN, built-in	8	18	26	8GB31861RC		1
	63 A, 8 Way TPN, built-in	8	24	32	8GB31862RC		1
	63 A, 12 Way TPN, built-in	8	36	44	8GB31864RC		1
Wire Way Boxes (WWB)							
	WWB for Flexi DB,8Mod	—	—	—	8GB9908FWWNT	Price on request	1/5
	WWB for Flexi DB,12Mod	—	—	—	8GB9912FWWNT		1/5
	WWB for Flexi DB,16Mod	—	—	—	8GB9916FWWNT		1/5
	WWB for Bus DB	—	—	—	8GB99BUSWWNT		1/5
	WWB for Bus Plus DB	—	—	—	8GB99BPLUSWWNT		1/5
Modular Device Boxes (MDB)							
	MDB for Flexi DB, 8Mod/Row	—	—	8	8GB9908FMDTC	Price on request	1/5
	MDB for Flexi DB,12Mod/Row	—	—	12	8GB9912FMDTC		1/5
	MDB for Flexi DB,16Mod/Row	—	—	16	8GB9916FMDTC		1/5
	MDB for Bus DB	—	—	12	8GB99BUSMBTC		1/5
	MDB for Bus Plus DB	—	—	12	8GB99BPLUSMBTC		1/5
BetaMulti (DBs for power & communication), IP42							
	12 way SPN, built-in	2	12	14	8GB31315RC	Price on request	1
	4 Way TPN, Built-in	8	12	20	8GB31320RC		1
	6 way TPN, built-in	8	18	26	8GB31321RC		1
	8 Way TPN, Built-in	8	24	32	8GB31322RC		1
Beta CO (DBs with provision for phase changeover switches), IP42							
	4 way, with provision	8	12	20	8GB31840RC	Price on request	1
	6 way, with provision	8	18	26	8GB31841RC		1
	8 way, with provision	8	24	32	8GB31842RC		1
	12 way, with provision	8	36	44	8GB31844RC		1

Betagard Distribution Boards Accessories

	Item Description	Reference No	Unit MRP* ₹	Std. Pkg.** (Nos.)
Blanking Plate				
	1.5 MW	8GB9902	Price on request	25

Note:
* MRP - Maximum Retail Price
** Purchase MOQ for our authorized dealers is in multiples of standard packing, contact Siemens Sales Office for further details

Discontinued Products

Betagard Circuit Breakers 5SY4, with C characteristics

Reference No.	Reference No.
5SY41807CC	5SY43807CC
5SY42807CC	5SY44807CC

Modular Devices

Reference No.	Reference No.	Reference No.
5TE8161	5TT58000	5TT58306
5TE8162	5TT58006	
5TE8142	5TT58016	

Terms and Conditions

Maximum Retail Price (MRP) / List Price (LP) is subject to revision without prior notice.

The company reserves the right to supply goods at its works or godown at its discretion.

The minimum order size for non-stock items (items not marked with ■) is 50 Nos. for each item or ₹ 50,000/- per item.

Export control regulation - retention clause: The fulfillment of the agreement on Siemens part is subject to the provision that this shall not be prevented by implements on the grounds of national and international legal requirements, in particular export control provision.

Stock items

The normal stock items (indicated by ■) are subject to change without prior notice.

Note

- **This supercedes all previous Price Lists.**
- **List Prices (LPs) mentioned are exclusive of all taxes.**
- **Maximum Retail Prices (MRPs) mentioned in the publication are maximum recommended selling prices.**
- **Invoice amount not to exceed MRP.**
- **Invoice amount = MRP (less) applicable discount + applicable GST %.**
- **For receiving material in factory sealed packing, we request you to order in multiples of the indicated standard packing quantity.**

Ask your nearest Siemens partners to include you in our mailing list.

Always make your purchases only from our authorized dealers. Details available with our sales office/territory managers.



7KT PAC1200

Multichannel current measuring system for flexible multichannel monitoring in final distribution

Current Sensors
- Versions: 40 A, 63 A

Sensor Bar
- Versions available for 3, 6, 9, 12

Data Manager
- Connection of up to 96 sensors (40A/63A)
- DIN rail installation (4MW)

Communication/ Software:
- Modbus TCP/ IP
- Simple system onfiguration via web server
- Easy access to energy data with mobile app (iOS/Android)

*For more details, contact nearest Siemens Sales Office


siemens.com/powermonitoring

SIEMENS

- Modbus TCP/IP communication
- Simple configuration of system via powerconfig and web server
- Visualization of consumption via Webserver and Mobile App (Android /iOS)

fast

- Flexible sensor bars and current sensors to record up to 96 circuits in one system
- Current sensors simply plug onto the sensor bars, eliminating extensive wiring

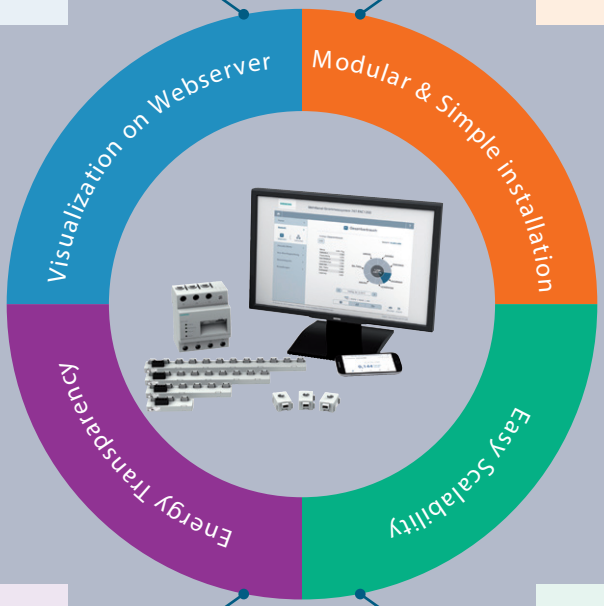

plug and play

- Targeted detection of power guzzlers
- Simultaneous display of power consumption and costs
- Ensures optimal power monitoring

- Easy to Upgrade
- Scale up the system without any interruption or cumbersome wiring

Flexible

Easy

Transparent






Cost-efficient

siemens.com/powermonitoring

Relevant Standards

Title	IS	IEC	Products							
			MCB		RCCB		RCBO	DB	AFDD	SPD
			5SL4/6/7	5SL5	5SV	5SM	5SU1	8GB	5SM6	5SD7
Electric Installations – MCBs for Building Installations and Similar Purposes Part 1: MCBs for AC Systems	IS 60898-1	IEC 60898-1	✓	–	–	–	–	–	–	–
Low-voltage switchgear and controlgear Part 2: Circuit-breakers	IS 60947-2	IEC 60947-2	–	✓		–	–	–	–	–
Residual Current Operated Circuit-Breakers for household and Similar uses, Part 1: Circuit-Breakers Without Integral Overcurrent Protection (RCCBs)	IS 12640-1	IEC 61008-1	–	–	✓	✓	–	–	–	–
Residual Current Operated Circuit-Breaking for household and Similar uses, Part 2: Circuit-Breakers with Integral Overcurrent Protection (RCBOs)	IS 12640-2	IEC 61009-1	–	–	–	–	✓	–	–	–
General requirements for arc fault detection devices	–	IEC 62606	–	–	–	–	–	–	✓	–
Low-voltage switchgear and controlgear assemblies, Part 2: Power switchgear and controlgear assemblies	–	IEC 61439-1/3	–	–	–	–	–	✓	–	–
Surge protective devices connected to low-voltage power systems	–	IEC 61643-11	–	–	–	–	–	–	–	✓

Degree of Protection

First digit: Protection against solid foreign objects		Second digit: Protection against ingress of water	
	0 No protection		0 No protection
	1 Protected against solid objects up to 50mm (e.g. hand)		1 Protection against vertically falling drops of water (e.g. condensation)
	2 Protected against solid objects up to 12mm diameter (e.g. finger)		2 Protection against direct sprays of water up to 15 degrees from vertical
	3 Protected against solid objects up to 2.5mm diameter (e.g. screwdriver)		3 Protection against direct sprays of water up to 60 degrees from vertical
	4 Protected against solid objects up to 1mm diameter (e.g. wire)		4 Protection against water sprayed from all directions, limited ingress permitted
	5 Protected against dust: limited ingress permitted, no harmful deposit.		5 Protected against low-pressure jets of water from all directions, limited ingress permitted
	6 Totally protected against dust		6 Protected against strong jets of water from all directions, limited ingress permitted (e.g. water from heavy seas on a ship's deck)
			7 Protected against the effect of temporary immersion (30 min) between 15cm and 1m
			8 Protected against long period of immersion under pressure
			9 Protected against high pressure, high temperature jets of water from multiple directions


IP 6 8

Installation Guideline for RCCB

RCCB suitability for various distribution networks.

Betagard RCCBs can be used in all 3 distribution network types viz. TN, TT & an IT network system. 4 pole RCCBs can also be used in 3 pole supply networks by adhering to installation guidelines. In this case, connection must be at terminals 1, 3 and 5 and 2, 4 and 6.

The function of the test equipment is only ensured if a jumper is fitted between terminals 3 and N.

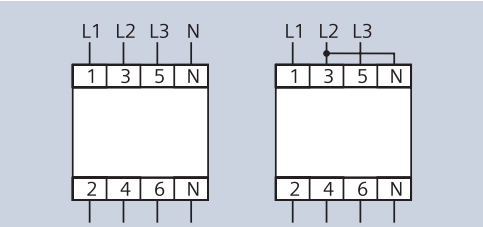


Types and waveform

					6 mA	10 mA		
Type AC		■	–	–	–	–	–	–
Type A		■	■	■	■	–	–	–
Type F		■	■	■	■	■	■	–
Type B		■	■	■	■	■	■	■
Type B+	kHz	■	■	■	■	■	■	■

Version

SIGRES	with active condensation protection for use in severe ambient conditions
[G] / [K]	super-resistant, 10 ms short-term delayed devices with increased immunity to false triggering due to transient disruptions
[S]	as an upstream group switch for selective shutdown against downstream RCCBs

Installation locations for Surge Protection Devices (SPDs)

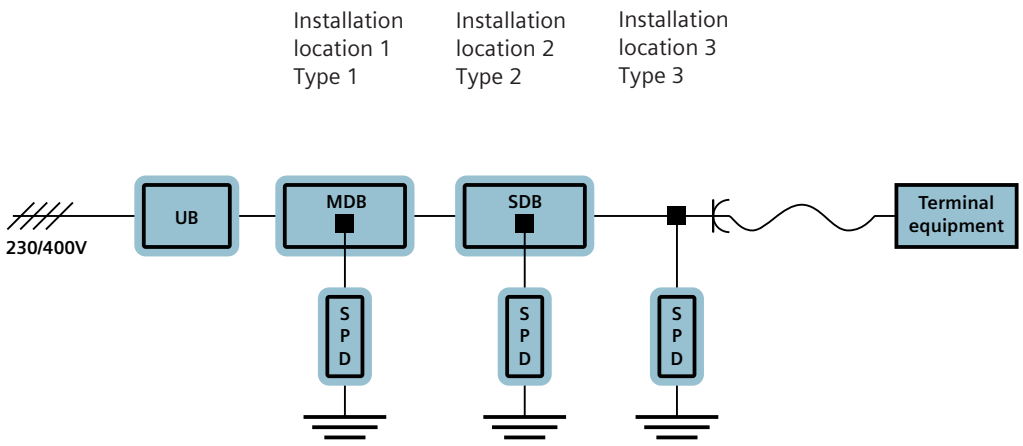


UB: Utility Box MDB: Main distribution board SDB: Sub Distribution board

Installation location 1 must be as close as possible to the supply point for the electrical system, so that the downstream installations are protected. The SPDs at installation locations 2 and 3 shall not be used without SPDs at installation location 1, and they must be coordinated with these SPDs (i.e. SPDs all from the same manufacturer).

One point of contact for your service needs

The comprehensive range of services from Siemens is sure to cover the needs of the most varied users. We offer structured services, designed to give you valuable support in every phase during the lifecycle of your final distribution products.

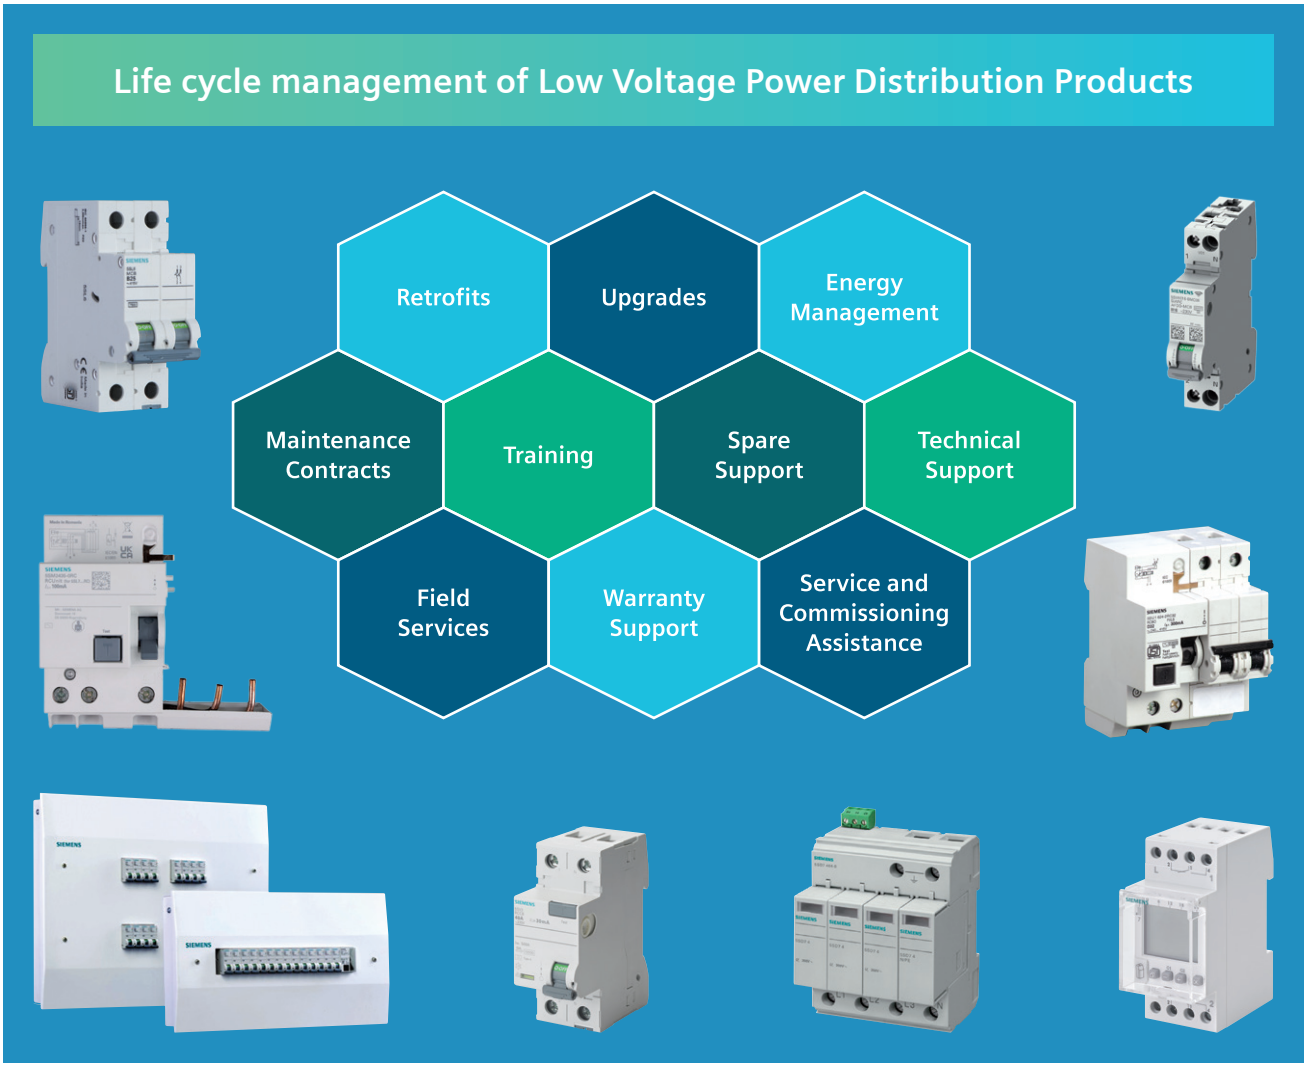

Please contact us for more details

CUSTOMER CARE

Toll Free No: 1800220987 / 18002090987 • E-mail: ics.india@siemens.com

Customer care

One stop support for all service needs:

- Breakdown service
- Annual maintenance contracts
- Retrofit solutions
- Spares
- Digitalization & Panel retrofits

For more details please contact:
Customer care desk
Siemens Limited
R&D Technology Centre
Thane Belapur Road, Airoli Node, Navi Mumbai - 400708
For more information contact toll free 1800 209 1800
http://support.automation.siemens.com/in

Notes

Your Partners

Sales offices:

Ahmedabad
3rd Floor, Prerna Arbour, Chimanlal Girdharlal Road, Navrangpura
Near Girish Coldrinks, Ahmedabad, Gujrat - 380009
Tel: +91 79 30927600
Mobile: +91 9925001779
E-mail: chandrakant.keshrani@siemens.com

Baroda
1st Floor, Ishan Building, Sarabhai Campus
Beside Neptune Edge Building, Subhanpura
Vadodara, Gujarat - 390023
Mobile: +91 9429037805
E-mail: kalpeshkumar.darji@siemens.com

Bengaluru
2nd Floor, Jyoti Mahal, No. 49, St. Marks Road
Bengaluru - 560001
Tel: +91 80 33422000
Mobile: +91 9167527072
E-mail: kumar.cvs@siemens.com

Bhubaneshwar
Awfis, Ground Floor, Ginger, Opp. NALCO Bhavan
Jayadev Vihar, Nayapalli, Bhubhaneswar - 751013
Mobile: +91 8696222212
E-mail: rohit.nandan@siemens.com

Chandigarh
Awfis Ltd., 2nd Floor, Motiaz Royal Business Park
Chandigarh-Ambala Highway
Zirakpur, Punjab - 140603
Mobile: +91 9888484066
E-mail: padam.sharma@siemens.com

Chennai
4th Floor, ETA Mount Central, Seethakathi Business Centre
Mount Road, Chennai - 600006
Tel: +91 44 30474000
Mobile: +91 8754403663
E-mail: ragesh.subramanian@siemens.com

Coimbatore
Regus, 6th Floor, Hanudev Infopark, Udayampalayam Main Rd
Nava India Rd, Coimbatore - 641028
Mobile: +91 9167527072
E-mail: kumar.cvs@siemens.com

Delhi / Gurgaon
DLF Cyber Park, Tower B, 10th Floor, Plot No. 405B
Udyog Vihar Phase-II, Gurugram - 122008, India
Mobile: +91 9971091588
E-mail: manjeet.mor@siemens.com

Hyderabad
5-9-19, 4th Floor, Lakshmi Narasinh Estate
Hyderabad - 500004
Tel: +91 40 2939 0089
Mobile: +91 9167527072
E-mail: kumar.cvs@siemens.com

Jaipur
Jaipur Centre Mall, Regus, 6th Floor, Cabin No. 633
Tonk Road, Jaipur - 302017
Mobile: +91 9818099433
E-mail: rajesh.raina@siemens.com

Jamshedpur
"My Branch", Fairdeal Complex, 1st Floor
Opp. Ram Mandir, Main Road, Bistupur
Jamshedpur, Jharkhand - 831001
Mobile: +91 8696222212
E-mail: rohit.nandan@siemens.com

Kolkata
1st Floor, 43, Shanti Palli, Rashbihari Bypass Connector
Kolkata - 700042
Tel: +91 33 30939000
Mobile: +91 9051015666
E-mail: amarnath.karmakar@siemens.com

Lucknow
B-1212/5, Indira Nagar, Lucknow, Uttar Pradesh -226016
Mobile: +91 9918002525
E-mail: atul.shukla@siemens.com

Mumbai
2nd Floor, R&D Building
Kalwa Works, Thane Belapur Road
Airoli, Navi Mumbai - 400708
Tel: +91 22 39663000
Mobile: +91 9822467311
E-mail: abhijeet.dandekar@siemens.com

Pune
Tower C, Panchshil Business Park, Survey No. 20
Balewadi, Pune - 411045
Tel: +91 20 30466000
Mobile: +91 9983691888
E-mail: anurag.shah@siemens.com

Territory managers:

Belagavi
CTS No-4011, Flat No 301, 3rd Floor, Ambica Landmark Apartments
Bhagyanagar 2nd Cross, Belagavi - 590006
Mobile: +91 7483502752
E-mail: swapnil.adure@siemens.com

Bharuch
Bungalow No. 1, Sanskar Villa, Behind Yogi Petrol Pump
Narmada Chokdi, Zadeshwar, Bharuch - 392011
Mobile: +91 8884000998
E-mail: viral.kachhadia@siemens.com

Bhilai
Jr. M.I.G 601, Chilpy Height, Bhawna Nagar
Near Shankar Nagar, Raipur - 492007
Mobile: +91 8823823438
E-mail: ashutosh-singh@siemens.com

Bhopal
D-3 Pebble Bay Phase 2, Bagmugaliya, Near IVY Global School
Bhopal - 462043, Madhya Pradesh
Mobile: +91 9926415756
E-mail: laxmi-narayan.dhakar@siemens.com

Boisar
A-505, 5th Floor, Fia Orion Grand
Near ISKON Temple, Palghar (East) - 401404
E-Mail: abhijit-prabhakar.salvi@siemens.com
Mobile: +91 9833905666

Chhatrapati Sambhajinagar (Aurangabad)
Room No. 1, Jyothirling Luxury Building, Waluj Mahanagar 1
Beside MSEB Office, Chhatrapati Sambhajinagar - 431001
Mobile: +91 8087742504
E-mail: vyankatesh.shendge@siemens.com

Cochin
E172, Federal Park, Vennala PO, Ernakulam - 682028
Mobile: +91 9447313241
E-mail: max.tom@siemens.com

Durgapur
C/o Bandana Pal, House No. 3250, Rajbandh Station Road
PS: Kanksa, Near Rajbandh State Bank
Durgapur - 713212, West Bengal
Mobile: +91 9002715943
E-mail: debdulal.dutta@siemens.com

Guwahati
Shivalaya Housing Society, Flat No. B-3A, Bylane 4, Joymatinagar
Adabari, Pandu, Guwahati - 781012, Assam
Mobile: +91 9864110684
E-mail: biplab.datta@siemens.com

Haridwar
41, Green Estate Phase- II
A2Z, Muzaffarnagar, Uttar Pradesh - 251001
Mobile: +91 9953256270
E-mail: vinod.nishad@siemens.com

Indore
87/A Chetan Nagar, Behind Bangali Square
Kanadiya Road, Indore, M.P. - 452016
Mobile: +91 7509200147
E-mail: ankur-jain@siemens.com

Jalandhar
H.No. 212A, Punjabi Bagh Extn, Near Curo Mall
Jalandhar - 144001, India
Mobile: +91 9876047929
E-mail: sunil.singla@siemens.com

Kolhapur & Goa
Krushna Krupa Lake View, Flat No. 403
Jivba Nana Jadhav Road, Kolhapur - 416007
Mobile: +91 9970961852
E-mail: Jivan.kesarkar@siemens.com

Kota
A-3, 1st Floor, Shrinath Estate, MBS Nagar, Railway Station Road
Kota - 324002, Rajasthan
Mobile: +91 8529042228
E-mail: gaurav-sharma@siemens.com

Ludhiana
House No. 91, Lane 25, Bhagya Homes
Rahon Road, Ludhiana - 141007, India
Mobile: +91 9872419990
E-mail: ravinder.pal@siemens.com

Madurai
B6, 17th Avenue Gladway Greencity
Avaniyapuram, Madurai - 625012
Mobile: +91 8667482574
E-mail: s.bhuvanesh.kanth@siemens.com

Nagpur
Plot No. 117, 118, 119, Flat No. 202, Yatharth Apartment
Mahalaxmi Society, Manish Nagar, Nagpur - 440015
Mobile: +91 9049610003
E-mail: sanjay.lonkar@siemens.com

Nashik
Nashik Works, Plot No. C1, Additional Industrial Area
MIDC Ambad, Nashik - 422010, Maharashtra
Mobile: +91 9822193204
E-mail: dhananjay.thorat@siemens.com

Patna
Road No. 12A, Keshri Nagar
Near Veer Kunwar Singh Chowk, Patna - 800024
Mobile: +91 7070192127
E-mail: kumar.rk.rakesh@siemens.com

Pondicherry & Trichy
No 14A, Jeevanandham Street, Dr Radhakrishnan Nagar
Meenatchipet, Puducherry - 605000
Mobile: +91 9751486018
E-mail: durairaj.r@siemens.com

Raipur
Mobile: +91 8696222212
E-mail: rohit.nandan@siemens.com

Rajkot
Flat No. 204, D Wing, Icon Platinum, Opp. Rani Residency
Behind Ayurvedik Hospital, University Road, Gujarat, Rajkot - 360005
Mobile: +91 9875038983
E-mail: jigneshkumar.dalsaniya@siemens.com

Ranchi
Astha Regency, Block-A, Flat No. 805, 8th Floor, Ratu Pandra Road
Piska More, PS-Sukhdeo Nagar, Ranchi, Jharkhand - 834005
Mobile: +91 7033537344
E-mail: soumitra.dutta@siemens.com

Rourkela
House No. 102 & 103, Y3, Brahmani Castle, Civil Town Ship
Near Forum Galleria Mall, Rourkela - 769012
Mobile: +91 9861056581
E-mail: ashirbad.das@siemens.com

Rudrapur
Village – Nawar – Khera,
Saheed Rajendra Singh Bhakuni Marg, PO - Kathgodam, Golapar
Haldwani, Distt Nainital, Uttrakhand - 263126
Mobile: +91 9839174578
E-mail: girish.pandey@siemens.com

Salem
4/1, 2nd Street, Sakthi Nagar Annex, Judge Road
Ayyanthirumalgai Post, Salem - 636 008
E-mail: rubengerald.s@siemens.com
Mobile: +91 9894617772

Sonepat & Panipat
House No. 21, Virk Nagar, Near Sant Nagar
Nirankari Bhawan, Panipat - 132103
Mobile: +91 9911316981
E-mail: mohit.bisaria@siemens.com

Sricity
No.84, Bazaar Street, Thandalam, Near Periyapalayam
Thiruvallur - 601102
Mobile: +91 9789824823
E-Mail: r.vikram@siemens.com

Sriperumbudur
Villa 63, Shriram One City, Valarpuram, Sriperambudur - 602105
Mobile: +91 9344622236
E-mail: arshath.b@siemens.com

Surat - 1
House No.12, Suvarnaraj Society, Opp. Nova Apex Apartments
Near Gantawala Panshop, Adajan, Surat - 395009
Mobile: +91 9904717949
E-mail: dhaval.tailor@siemens.com

Surat - 2
3/2213-2, Salabatpura, Pipardi Sheri, Surat - 395003
Mobile- +91 9913197816
E-mail: nirav.jariwala@siemens.com

Udaipur
E45, Sector 14, Behind Capital Tower, Udaipur - 313002, Rajasthan
Mobile: +91 8003088889
E-mail: ankur.pancholi@siemens.com

Vapi
Pramukh Vedanta, Alok Colony, Chala, Vapi - 396191, Gujarat
Mobile: +91 8655512139
E-mail: deepak.gorad@siemens.com

Varanasi
Vrindavan Residency, Nuaon Bypass
Tikari Road, Dafi, Varanasi - 221011 (U.P.)
Mobile: +91 9984500021
E-mail: kumardeepak@siemens.com

Vijayawada
Door No. 12, Tarapet, Vijayawada - 520001
Mobile: +91 9966637966
E-mail: lakshmi-narayana.ramineni@siemens.com

Vizag
Mobile: +91 9849323838
E-mail: sivadurgaprasad.mondeti@siemens.com

Siemens Limited
Smart Infrastructure
Electrical Products
R&D Technology Centre
Thane Belapur Road
Airoli Node, Navi Mumbai - 400708
For more information contact toll free
1800 209 1800
E-mail: lvsgr-mktg.india@siemens.com

Order No.: 115905711
SI-EP-CC-DIPL-112026
(This replaces SI-EP-CC-DIPL-072026
dated 1st July, 2026)

Customer Care Toll free no. 1800 209 0987
Email: ics.india@siemens.com

Product upgradation is a continuous process. Hence, data in this pricelist is subject to change without prior notice. For the latest information, please get in touch with our Sales Offices.